

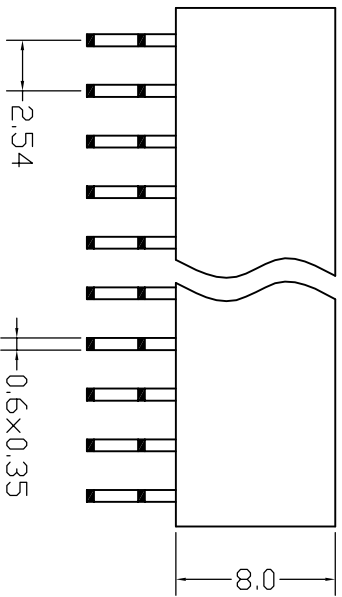


序号/rev.No.	名称/Title	文件编号/File No.
1	114双排塑料件	0J/XYT-11125
2	114端子(短弯)	0J/XYT-11126
3	114端子(长弯)	0J/XYT-11127

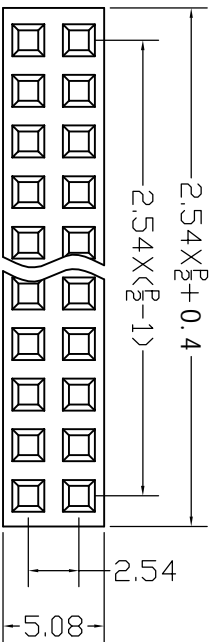

Specifications:
 Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding
 Voltage: AC 500V For 1 minute
 Operating Temperature: -55°C--+105°C
 Contact: Brass
 Housing: PBT &30% Glass Fiber(UL 94V-0)

- 要求:
1. 塑料件无裂痕。
 2. 整排针成一直线，相邻针之间相互平行。

序号/Rev.No. 更改记录/Revision note 签名/Signature 日期/Date

设计/Designed by	绘图/Draw ing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X: ±0.2 X* ±2 .X ±0.1 .X* ±1 .XX ±0.05 .XX ±0.5 .XXX ±0.01
图名/Title		文件编号/File No.		
114-A-DRXXG				
备注/Remark	页序/Sheet	单位/Units: mm		

新亚电子
 XINYA ELECTRONIC CO.,LTD