



| REV | DESCRIPTION | DATE |
|-----|-------------|------|
|     |             |      |
|     |             |      |
|     |             |      |

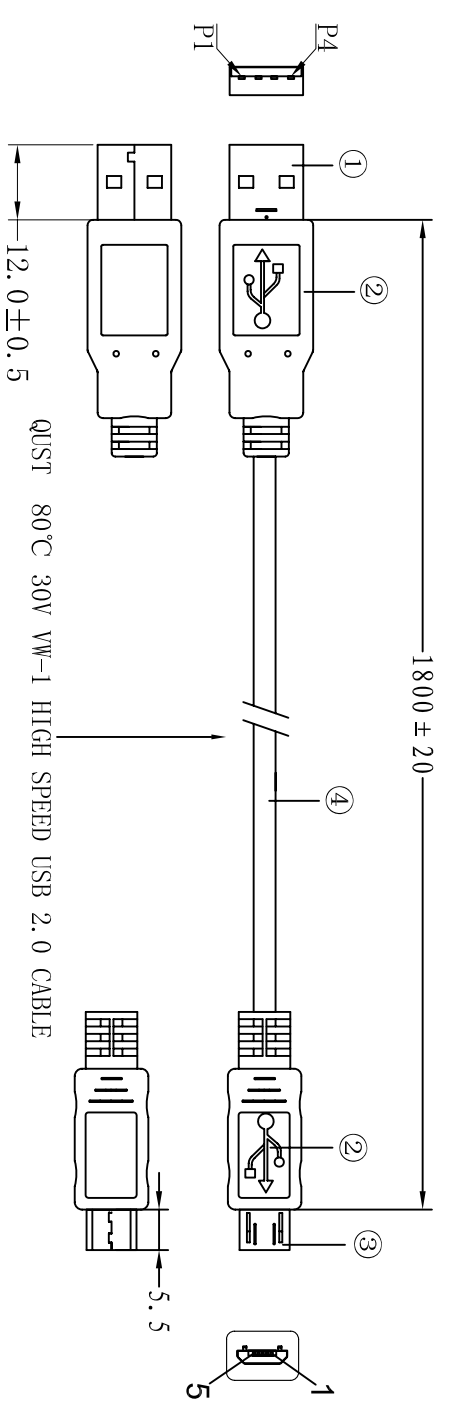

WIRING TABLE:

| A           | B |
|-------------|---|
| 1 --- Red   | 1 |
| 2 --- White | 2 |
| 3 --- Green | 3 |
| 4 --- Black | 5 |
| G --- DW+BD | G |

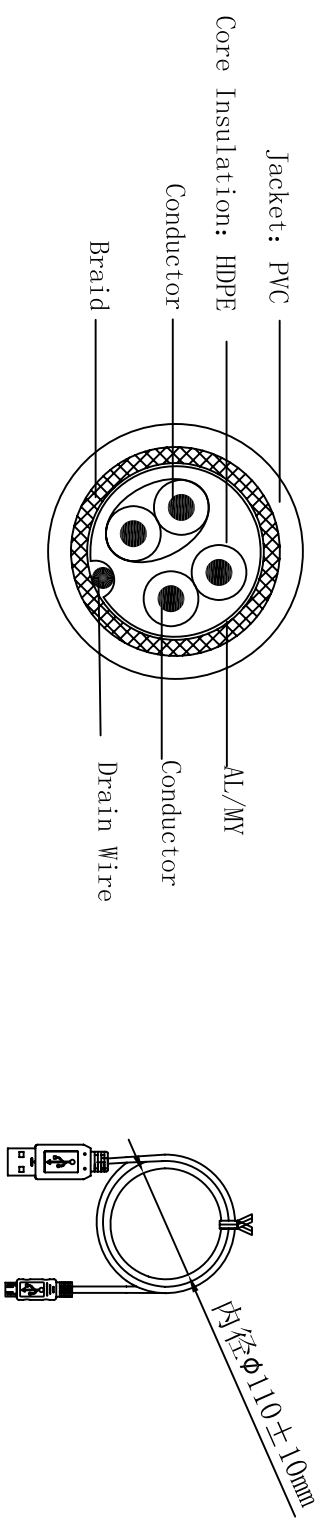

Test Conditions:  
 1. 100% open & short circuit test;  
 2. Insulation Resistance: 2.0ohm (MAX) ;  
 3. Conduction Resistance: 5Mohm (MIN) at 300V DC/0.01S .

|     |  |                 |          |
|-----|--|-----------------|----------|
| ④   | CABLE:USB2.0[30AWG*1P+30AWG*2C+AL/MY+DW+BD] OD:4.0±0.2,PVC JACKET, BLACK | mm              | 1800     |
| ③   | OVER MOLDING:PVC-50P BLACK PVC   | g               |          |
| ②   | PLUG:MICROUSB 5P MALE SOLDERING TYPE,NICKEL-PLATED, PBT BLACK            | SET             | 1        |
| ①   | PLUG:USB A MALE SOLDERING TYPE,NICKEL-PLATED PBT WHITE COLOR             | SET             | 1        |
| NO. | MATERIAL DESCRIPTION   | MATERIAL NUMBER | UNIT QTY |

**QUST International Ltd**

| TITLE           | USB AM/Micro USB | CUSTOMER     | UNIT         | mm   | PAGE: 1 of 1 |
|-----------------|------------------|--------------|--------------|------|--------------|
| PART NO.        | SAM-AC-124A      | CUSTOMER NO. |              |      |              |
| PRODUCT NO.     |                  | REV          | A/0          | DATE | 2013-05-26   |
| DRAWN BY: xiang | CHECKED BY:      |              | APPROVED BY: |      |              |