



ENGINEERING	PRODUCT SPECIFICATION	SPEC. NO.: SPCU004B
DEPT.	DVI CONNECTOR	PAGE: 1 / 3

1. SCOPE:

This specification contains the test requirement of subject connectors when tested under the condition and below standards base on CviLux test procedure

2. APPLICABLE STANDARDS:

Digital Visual Interface Revision 1.0	DDWG Standard
ANSI/EIA-364	Test Procedures and Conditions are referenced.
UL 94	Test for flammability of plastic materials for parts in devices and appliance

3. APPLICABLE SERIES No. : CU07 Series

4. SHAPE, CONSTRUCTION AND DIMENSIONS

See attached drawings

5. MATERIALS

See attached drawings

6. ACCOMMODATED P.C.BOARD

1.6 mm (.063")



APPROVED: Alex REVIEWED : David VERIFIED : Sandy .

ENGINEERING DEPT.	PRODUCT SPECIFICATION DVI CONNECTOR	SPEC. NO.: SPCU004B
		PAGE: 2 / 3

7. ELECTRICAL PERFORMANCE:


	ITEM	TEST CONDITION	REQUIREMENT
7.1	Rated current and voltage		3.0A 40V AC (r.m.s.)
7.2	Contact resistance	ANSI/EIA 364-23 Bulk resistance measured between plug solder tail and receptacle solder tails	20 mΩ max.
7.3	Dielectric strength	When applied AC 500 V 1 minute between adjacent terminal	No change
7.4	Insulation resistance	When applied DC 500 V between adjacent terminal or ground	More than 1000 MΩ

8. MECHANICAL PERFORMANCE:

	ITEM	TEST CONDITION	REQUIREMENT
8.1	Receptacle Contact retention	Retention speed 25± 3 mm per minute from housing	More than 0.45 Kgf
8.2	Receptacle Key retention	Retention speed 25± 3 mm per minute from housing	More than 0.90 Kgf
8.3	Plug Contact retention	Retention speed 25± 3 mm per minute from housing	4.5 Kgf min.
8.4	Plug Key retention	Retention speed 25± 3 mm per minute from housing	4.5 Kgf min.
8.5	Mating Force	Speed 25± 3 mm per minute	4.5 Kgf max.
8.6	Unmating Force	Speed 25± 3 mm per minute	1.0 Kgf min.
8.7	Durability	Connector shall be subjected to 100 cycles of insertion and withdrawal	Contact resistance: Less than twice of initial

9. ENVIRONMENTAL PERFORMANCE:

	ITEM	TEST CONDITION	REQUIREMENT
9.1	Temperature rise	Then carried the rated current	30 °C max.
9.2	Vibration	1.5 mm 10-55-10 HZ / minute each 2 hours for X, Y and Z directions	Appearance: No damage Discontinuity: 1 micro second max.
9.3	Solder ability	Soldering time: 5 ± 0.5 second Soldering pot: 230 ± 5 °C	Minimum: 90% of immersed area



ENGINEERING DEPT.	PRODUCT SPECIFICATION DVI CONNECTOR	SPEC. NO.: SPCU004B
		PAGE: 3 / 3

9.4	Resistance to soldering heat	Soldering time: 5 ± 0.5 second Soldering pot: $240 \pm 5^{\circ}\text{C}$	No damage
9.5	Heat aging	$105 \pm 2^{\circ}\text{C}$, 250 hours	Contact resistance: Less than twice of initial
9.6	Humidity	ANSI/EIA 364-31, Condition A and B Method 3, omit 7A and 7B	Contact resistance: Less than twice of initial

10. AMBIENT TEMPERATURE RANGE: -20 to $+85^{\circ}\text{C}$

Materials:

* Insulator: Glass filled PBT UL 94V-0

Color Nature

* Shell: Zinc alloy with Nickel plated

△* Contact: Brass

Ordering Code:

CU07 29 S * H I G

① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② Contacts: 29= 24+4+1

③ Contact type: S= Socket

④ Plating code:

A= Selective Gold flash plated over 1.27μm(50μ") Nickel


B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel

C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

⑤ Tail style: H= Right angle

⑥ Product type: I= Integrated Type

⑦ Option: G= Attach #4-40 UNC Hex screw

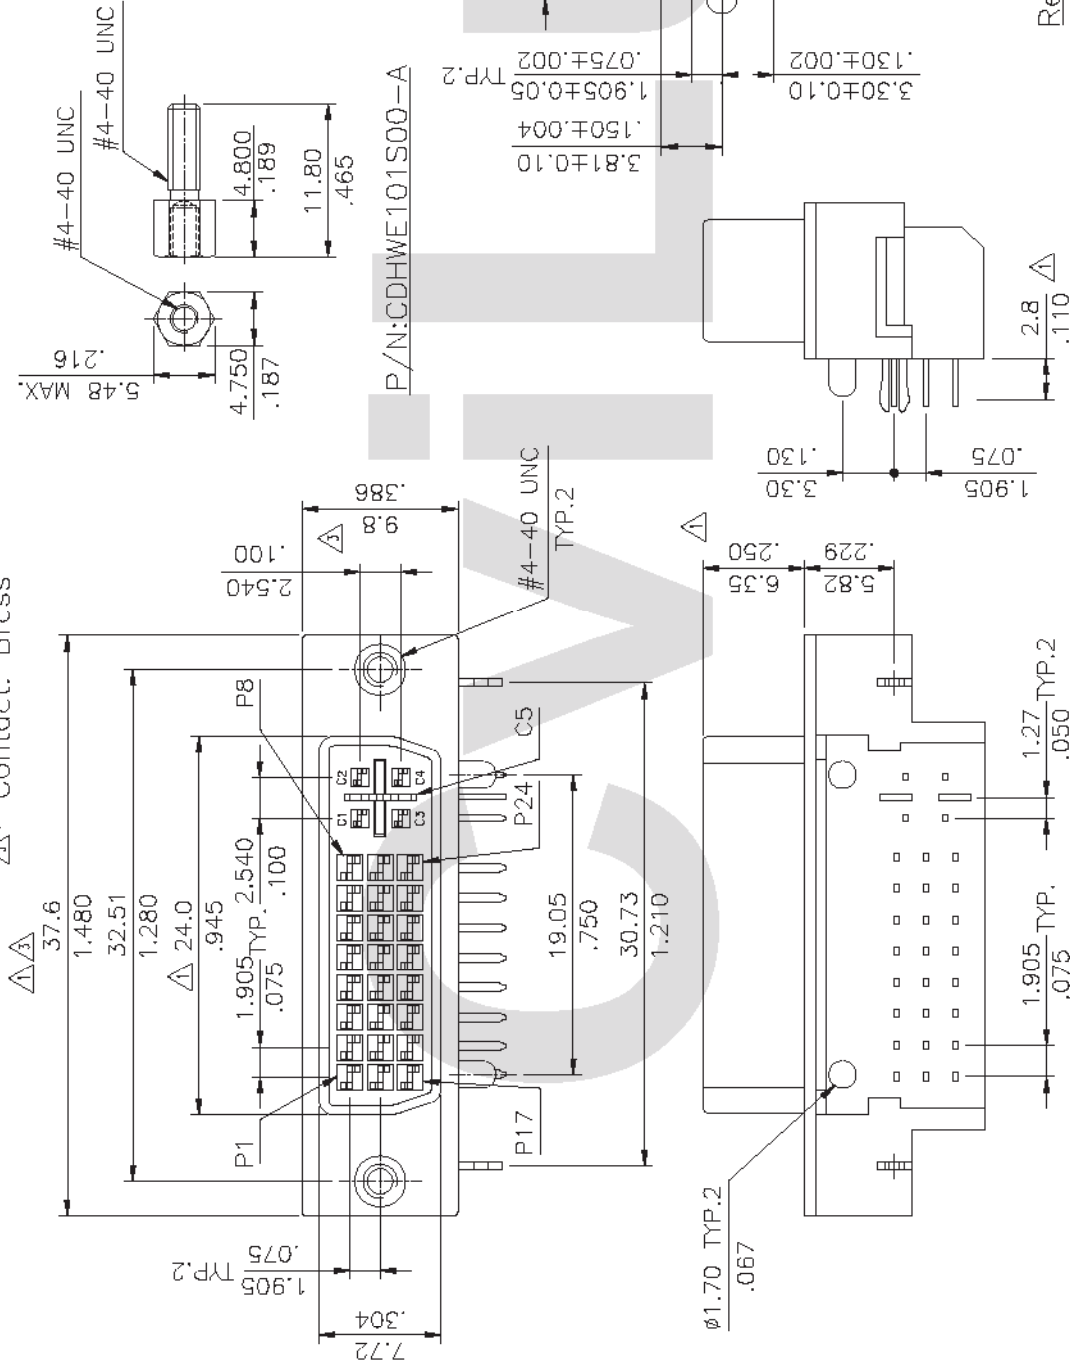

Recommended P.C. Board Layout

RoHS Compliant

④				DATE	UNIT: mm / inch	TITLE: DW R/A RECP. CONN. (INTEGRATED TYPE 24+4+1)
③	Sandy	11/27/06	11/24/06'		1.905 .075 3.30 .130	
②	Sun	9/30/05	11/27-06'	DRAWN BY: Sandy	3.81±0.10 1.50±.04 1.905±0.05 .075±.002 TYP.2	MATERIAL:
①	JASON	04/27-04	11/27-06'	ENGINEER: Eisley	3.30±0.10 1.30±.002 TYP.2	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	1.905 TYP. .075 1.27 TYP.2 .050	

CVILUX CORP.
2006.12.06
ISSUED



瀚菱股份有限公司
CvLux Corporation

DRAWING NO.	CU0709SD	PART NO.	CU0729S*HIG
SCALE	2 / 1	SHEET	1 OF 1