


SHB108

LGA1155 Intel® Xeon®/ Core™ i7/ i5 /i3 PICMG 1.3 Full-size CPU Card with Intel® C206 PCH, VGA, Dual LANs, Audio and ECC Memory

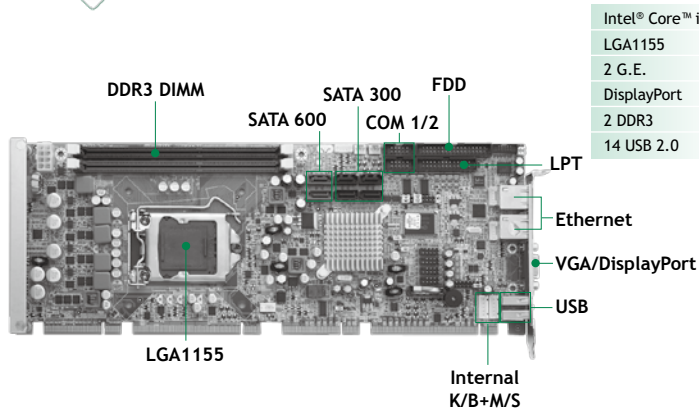

Intel® Core™ i
LGA1155
2 G.E.
DisplayPort
2 DDR3
14 USB 2.0

System

CPU	LGA1155 socket for Intel® Xeon®/ Core™ i3/ i5 /i7 processors
System Memory	2 x 240-pin DIMM supports DDR3-1066/1333 max. up to 16 GB
Chipset	Intel® C206 PCH
BIOS	AMI
SSD	N/A
Watchdog Timer	255 levels, 1-255 sec.
Expansion Interface	1 x PCIe x16 graphics port supports for SDVO or PCIe x1 devices 4 x PCIe lanes support 1 PCIe x4 or 4 PCIe x1 I/O devices 4 x 32-bit PCI bus masters LPC interface
Battery Lithium	3V/220mAh
Power Requirements	Intel® Xeon® E3-1275 @ 3.4 GHz, 1 GB DDR3 +5V SBY @ 0.1A, +3.3V @ 0.7A, +5V @ 0.95A, +12V @ 2.23A, -12V @ 17mA
Size	338 x 126 mm
Board Thickness	1.6 mm
Temperature	0° C ~ +60° C (32° F ~ 140° F), operation
Relative Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x FDD 1 x PS/2 keyboard 1 x PS/2 mouse 1 x LPT; with SPP/EPP/ECP supported 1 x RS-232/422/485 (COM 1) 1 x RS-232 (COM 2)
SATA	2 x SATA-600 & 4 x SATA-300 with RAID 0/1/10/5
Hardware Monitoring	Support CPU/System temperature, CPU/System voltage, and CPU/System Smart Fan features
Ethernet	1 st port 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM, iAMT with Intel® 82579LM 2 nd port 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® 82574L
Audio	HD Codec audio as MIC-in/Line-in/Line-out/Speaker-out with Realtek ALC662
USB	14 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
TPM	Infineon SLB9635 for trusted platform

Features

- Intel® LGA1155 socket + C206 PCH
- 2 DDR3 1066/1333 DIMM supports up to 16 GB memory capacity
- Intel® AMT 7.0 & TPM supported
- SATA-600 supported
- PCIe Gen2 at 5GT/s supported
- Supports ECC memory

Display

Chipset	Intel® HD graphics
Memory Size	Max. up to 352MB frame buffer dedicated memory
Display Interface	1x VGA 1x DisplayPort (optional)

Packing List

Standard		
Quick installation guide, user's manual/utility CD, cable		
Cable		
Part Number	Description	Qty
59380502000E	COM + Print cable w/ bracket	1
593826A0000E	SATA signal cable 500mm	1

Ordering Information

Standard	
SHB108VGGA	LGA1155 PICMG 1.3 full-size CPU card with (P/N: E38C10810X) VGA, 2 10/100/1000Mbps Ethernet and audio
SHB108PGGA	LGA1155 PICMG 1.3 Full-size CPU card with (P/N: E38C10810X) DisplayPort, 2 10/100/1000Mbps Ethernet and audio
Optional	
59384500100E	Audio cable w/ bracket, P=2.0 L=450mm
5938A808010E	2 x USB cable, L=190mm
593836A0030E	4-pin power cable to SATA x 2, L=150mm
59380000290E	PS/2 keyboard and mouse cable with bracket
E9B900C000	LGA1156 cooler 4-pin H:61.4mm

* Discrete graphic card is necessary for display if the chosen CPU doesn't have integrated graphics support.

SBC Services and Solutions

System on Modules

Embedded SBCs > EPIC

Embedded SBCs > 3.5" Caps

Embedded SBCs > Nano-ITX

Embedded SBCs > Pico-ITX

Embedded SBCs > PC/104

Industrial Motherboards

Slot CPU Cards

Accessories

Appendix