





RoHS

SPECIFICATIONS

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

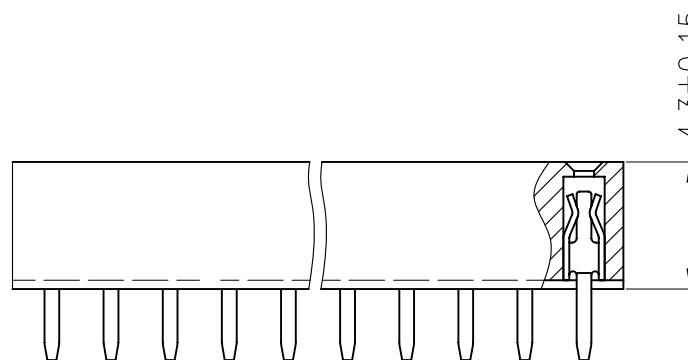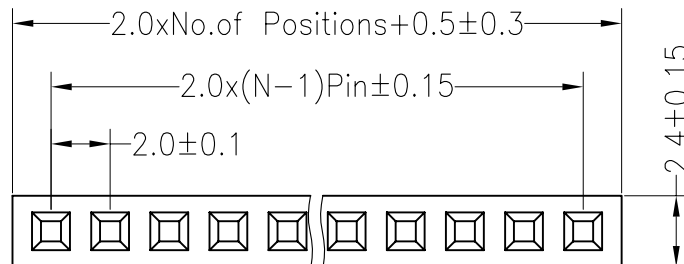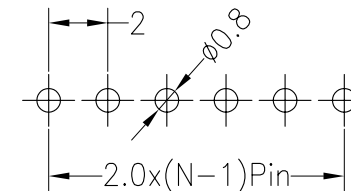

|     |      |                          |        |           |       |         |           |          |       |          |           |                                      |
|-----|------|--------------------------|--------|-----------|-------|---------|-----------|----------|-------|----------|-----------|--------------------------------------|
|     |      |                          |        | OPERATION |       | DRAW    | YiYuSheng | 12.04.18 | SCALE | FIT      | Conntherm |                                      |
|     |      |                          |        | X.X       | ±0.30 |         |           |          | UNIT  | mm       |           |                                      |
|     |      |                          |        | X.XX      | ±0.20 | CHECK   |           | SIZE     | A4    | PART NO. |           |                                      |
|     |      |                          |        | X.XXX     | ±0.10 | APPROVE |           | SHEET    | 1/1   |          |           | TITLE:<br>2.00PF H4.30mm 1xNpin 180° |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | DIM       | TOL   |         |           | PROJ.    |       |          |           |                                      |

A0 2012.04.18 NEW DRAWING

Conntherm

2.00PF H4.30mm 1xNpin 180°