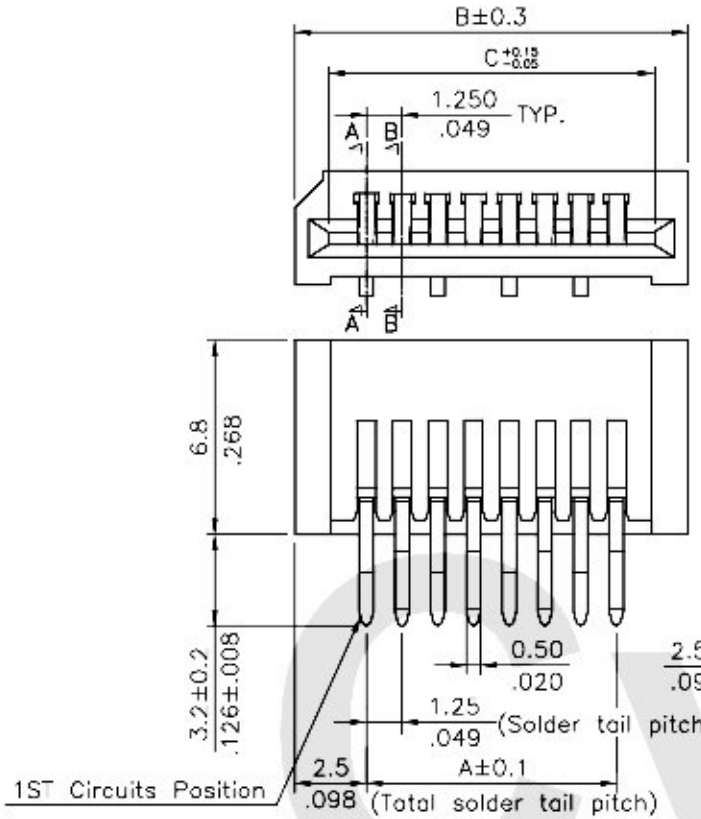

A = 1.25 x No. of Spaces
B = A + 5.0
C = A + 2.66
* Available in 3 through 36 circuits

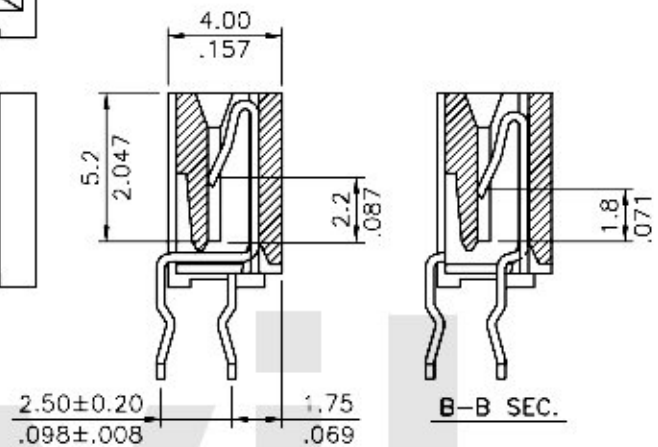

Material:
* Insulation: PBT. with 15% GF. Color Black
* Contact: Phosphor Bronze

Ordering Code

CF12 ** 1 V0 T 0
① ② ③ ④ ⑤ ⑥

①Series No.
②No. of Circuits
③Plating code:
1= 2.54μm(100μ") Tin over 0.76μm(30μ") Nickel
④Contact type : V0= Straight Dip type
⑤Packing : T= Tube Packaged
⑥Other option: 0= Standard

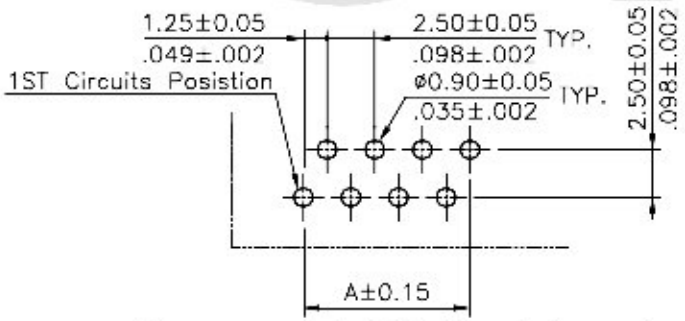

Recommended P.C. Board Layout

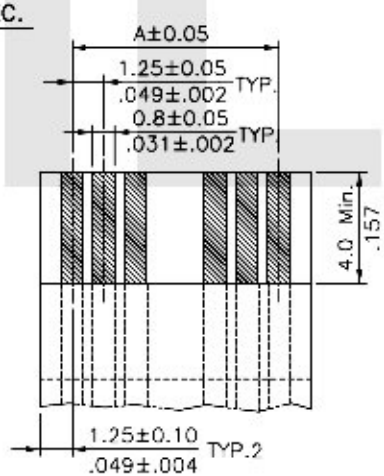

* ACCOMMODATED FFC



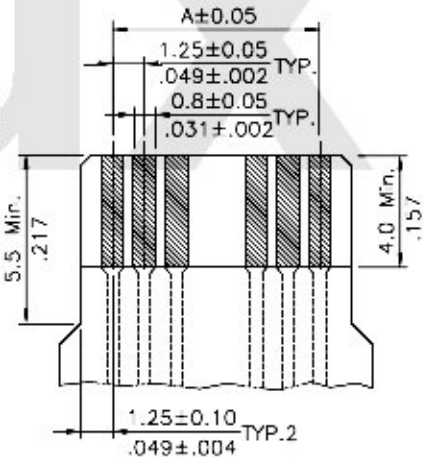

* ACCOMMODATED FPC



RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1	Eisley	1/9-06"	ECN06010

		DATE
DRAWN BY:	Eisley	01/09-06'
ENGINEER:	Eisley	01/09-06'
CHECKED BY:	David	01/10-06'
APPROVED BY:	Alex	01/10-06'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.15/.006	X.° ± 1°
.XX ± 0.10/.004	.X° ±
.XXX ± 0.05/.002	.XX° ±

TITLE: 1.25mm(.049") ST. DIP TYPE LIF FFC/FPC CONNECTOR

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CF1201SD	PART NO.	CF12**1V0T0
SCALE	3 / 1	SHEET 1 OF 1	