

## FAST RECOVER RECTIFIER

# BY296 THRU BY299

**VOLTAGE RANGE**  
**CURRENT**


**100 to 800 Volts**  
**2 .0Ampere**

### FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:  
260°C/10 secods/.375”(9.5mm)lead length at 5 lbs(2.3kg) tension

### MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.014 ounce, 0.39 grams

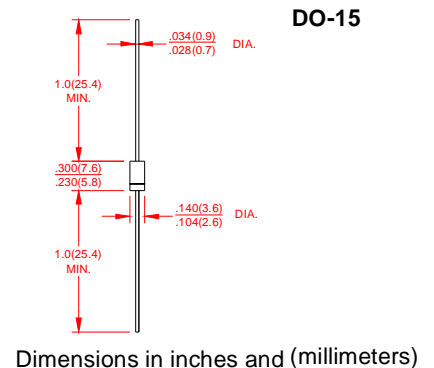

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	BY296	BY297	BY298	BY299	UNITS
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	200	400	800	Volts
Maximum RMS Voltage	$V_{RMS}$	70	140	280	560	Volts
Maximum DC Blocking Voltage	$V_{DC}$	100	200	400	800	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at $T_A=75^\circ C$	$I_{(AV)}$	2.0				Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	$I_{FSM}$	70				Amps
Maximum Instantaneous Forward Voltage @ 2.0A	$V_F$	1.3				Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A = 25^\circ C$	5.0				μA
	$T_A = 100^\circ C$	200				
Maximum Reverse Recovery Time (Note 3) $T_J=25^\circ C$	$t_{rr}$	500				ns
Typical Junction Capacitance (Note 1)	$C_J$	25				pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	40				°C/W
Operating Junction Temperature Range	$T_J$	(-55 to +150)				°C
Storage Temperature Range	$T_{STG}$	(-55 to +150)				°C

#### Notes:

1. Measured at 1.0MHz and Applied Reverse Voltage of 4.0Volts.
- 2 Thermal Resistance from junction to Ambient at .375”(9.5mm)lead length, P.C.board mounted.
- 3.Reverse Recovery Test Conditions:If=10mA,Ir=10mA,Irr=1A

# FAST RECOVER RECTIFIER

**BY296 THRU BY299**

**VOLTAGE RANGE  
CURRENT**

**100 to 800 Volts  
2.0 Ampere**

## RATING AND CHARACTERISTIC CURVES BY296 THRU BY299

