
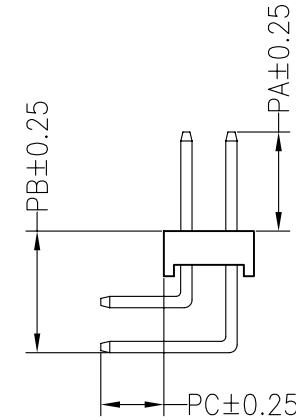
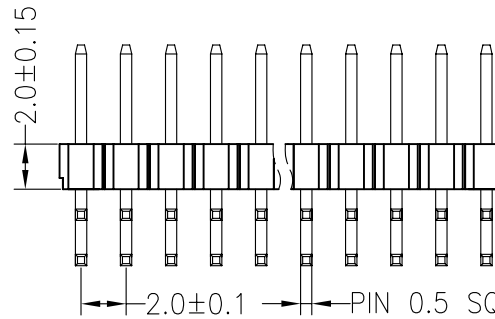
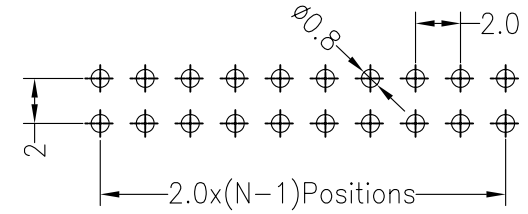


SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

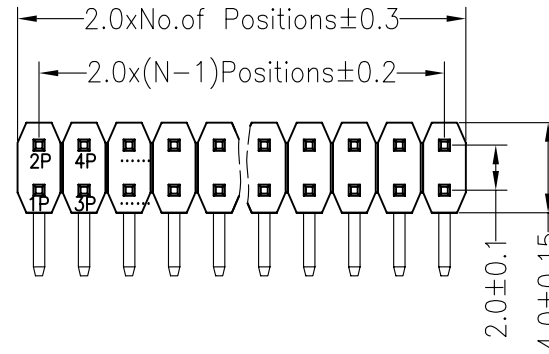

Dimension antitheses list					
ITEM	PA	PB	PC	L	L
Standard	4.00	5.30	2.80	10.50	14.50
Alternate					

OPERATION	DRAW	YiYuSheng	12.04.11	SCALE	FIT
X.X ±0.30	CHECK			UNIT	mm
X.XX ±0.20				SIZE	A4
X.XXX ±0.10				SHEET	1/1
Angle ±3°	APPROVE			PROJ.	◆ ↗
DIM TOL					

Conntherm		PART NO.	
		TITLE:	2.0PH 2xNpin H2.0mm 90°

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.11	NEW DRAWING	