

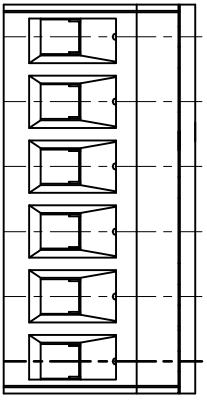

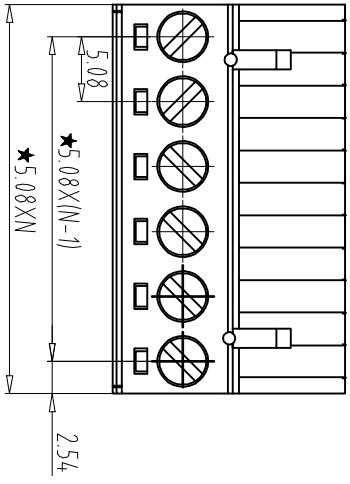


FILE: 2016-002UL0



REV	ECN NO.	CONTENT	CHK	DATE
V0.0		初版	ZCP	2016.11.14

NOTES:

1. Rating: <UL> 300V/16A  
<IEC> 320V/20A
- 2.Poles:02-24P
3. Insulation Withstands Voltage: AC2000V/1 Min
- 4.Screw Torque Value:0.4Nm
5. Insulation Resistance: 500MΩ at DC500V
6. Using Temperature Range: -40°C/+115°C
7. Suitable Electric Wire: 12-28AWG(UL) 2.5mm<sup>2</sup>(IEC)
8. Strip length:7-8mm
9. ROHS compliance
10. With' ★ "is important dimension

How to order  
**UL0-TB27 - 2K/5.08 - XXP - Y 0 0 0A**

Certificate Factory poles color: Customer requirements  
 Series NO. Code

- 1: Grey
- 2: Blue
- 3: Black
- 4: Green
- 5: Orange
- 6: Red
- 7: transparent
- 8: Yellow
- 9: white

Total Pitch Tolerances		Nominal dimension range		T		≡		—		//	
over	over	over	over	over	over	over	over	over	over	over	over
0	31	53	70	91	115	151	200	250	0	18	100
to	to	to	to	to	to	to	to	to	to	to	to
31	53	70	91	115	151	200	250	320	10	100	150
±0.10	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.08	±0.15	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2
0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.3	0.5

5	SCREW	S000000170	XX	STEEL	N2.5/Zn Plated
4	Clamp	1020B0010	XX	Phosphor Bronze	Tin Plated
3	BLOCK	X000000170	XX	Brass	Ni Plated
2	Cover	1021C0YXXA	1	PA66	UL94V-0
1	Housing	1021A0YXXA	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZCP	DATE	16.11.14	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	A4
APP.	DATE	NAME	<b>UL0-TB27-2K/5.08-XXP-Y000A</b>		
NINGBO UL0 ELECTRONICS CO.,LTD.					DWGNO
NINGBO UL0 ELECTRONICS CO.,LTD.					UL0TB27Y000A