

1

2

3

4

5

6

7

8

A




B

C

D

E

F

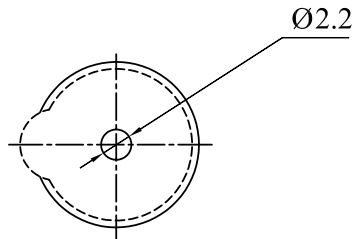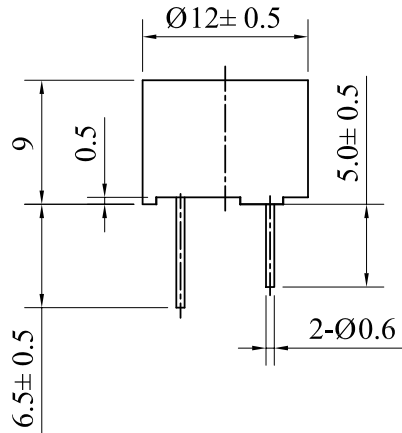

SPECIFICATION

- 1. Rated Voltage 5 V
- 2. Operating Voltage 4~8 V
- 3. Max. Rated Current 40mA
- 4. Coil Resistance 45±5 Ω
- 5. Coil Impedance 80 Ω
- 6. Min. Sound Pressure Level 85dB/10cm
- 7. Resonant Frequency 2400Hz
- 8. Case Material PBT
- 9. Operating Temperature -40~+70°C
- 10. Store Temperature -40~+80°C
- 11. Weight 2g

| | | | | | | |
|---|--|-------------|-----------|-----------------------|-----------------|--------------------|
| No. | | DESCRIPTION | APPROVED | DATE | Magnetic Buzzer | |
| TOLERANCES UNLESS NOTED OTHERWISE: .X = ± .XX = ± .XXX = ± 90° FORMED +2° ANGLES +1° | | DRAWN | APPROVALS | DATE | CFD06 | |
| FIRST ANGLE PROJECTION | | CHECKED | APPROVED | 04.09.15 | UNIT mm | DWG NO. 840.741 |
| | | APPROVED | 04.09.15 | SCALE NOT TO SCALE | SHEET | VER 1.1 |