


◆ SPECIFICATION

Data input

| | | | |
|-------------|---|--------|----|
| DESCRIPTION | UL2896 - 18N × 115mm * 1.0p * (5/5 , 10/10) * (0,1*0,65) * P7 | STYLE | N |
| | | UL2896 | 18 |

▶ CABLE TYPE (PATTERN 7)

▶ CABLE DIMENSION [unit : mm]

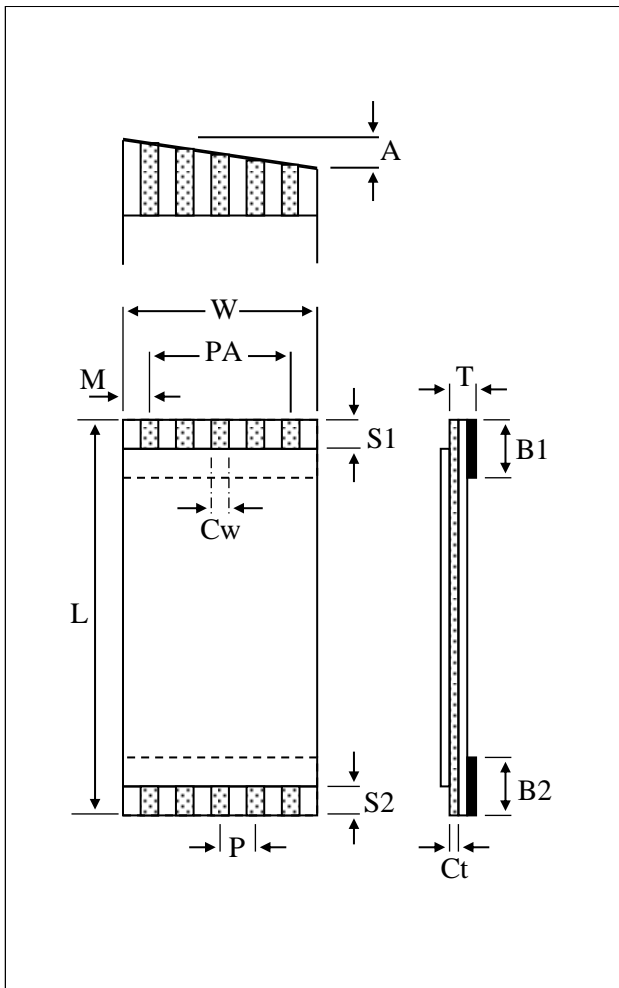

| DESCRIPTION | Abbr | Dimension | Tolerance |
|------------------|------|-----------|-----------|
| PITCH | P | 1.0 | ± 0.10 |
| NO. OF CONDUCTOR | N | 18 | - |
| CABLE LENGTH | L | 115 | ± 3.00 |
| STRIP LENGTH | S1 | 5 | ± 1.0 |
| | S2 | 5 | ± 1.0 |
| S/T LENGTH | B1 | 10 | ± 2.0 |
| | B2 | 10 | ± 2.0 |
| INSERT THICK | T | 0,3 | ± 0.05 |
| WIDTH | W | #ARG! | ± 0.15 |
| SPAN | PA | #ARG! | ± 0.15 |
| MARGIN | M | 1.0 | ± 0.15 |
| CONDUCTOR THICK | Ct | 0,10 | ± 0.01 |
| CONDUCTOR WIDTH | Cw | 0,65 | ± 0.03 |
| LESS THAN | A | 0,5 | - |
| PLATED | PL | 1μm ↑ | |

⊙ REMARK

| TL | P | S1 | S2 | B1 | B2 | Ct | Cw | pattern |
|-----|------|----|----|----|----|------|-----|---------|
| 115 | 1,00 | 5 | 5 | 10 | 10 | 0,10 | 0,7 | 7 |