

ELECTRICAL

Frequency : GSM Triband

Impedance : 50Ω

V.S.W.R : ≤ 2.5

Gain : 0dBi

Radiation : Directional

Polarization : Plane

Electrical wave : $1/8\lambda$, Monopole

MECHANICAL

Material : FR-4 PCB

Operating Temperature : $-20^{\circ}\text{C}\sim+65^{\circ}\text{C}$


Storage Temperature : $-30^{\circ}\text{C}\sim+75^{\circ}\text{C}$

Coaxial Cable : $\varnothing 1.13\text{mm}$

Connector : U.F.L

RoHS COMPLIANT

FR-4雙面板-0.4mm

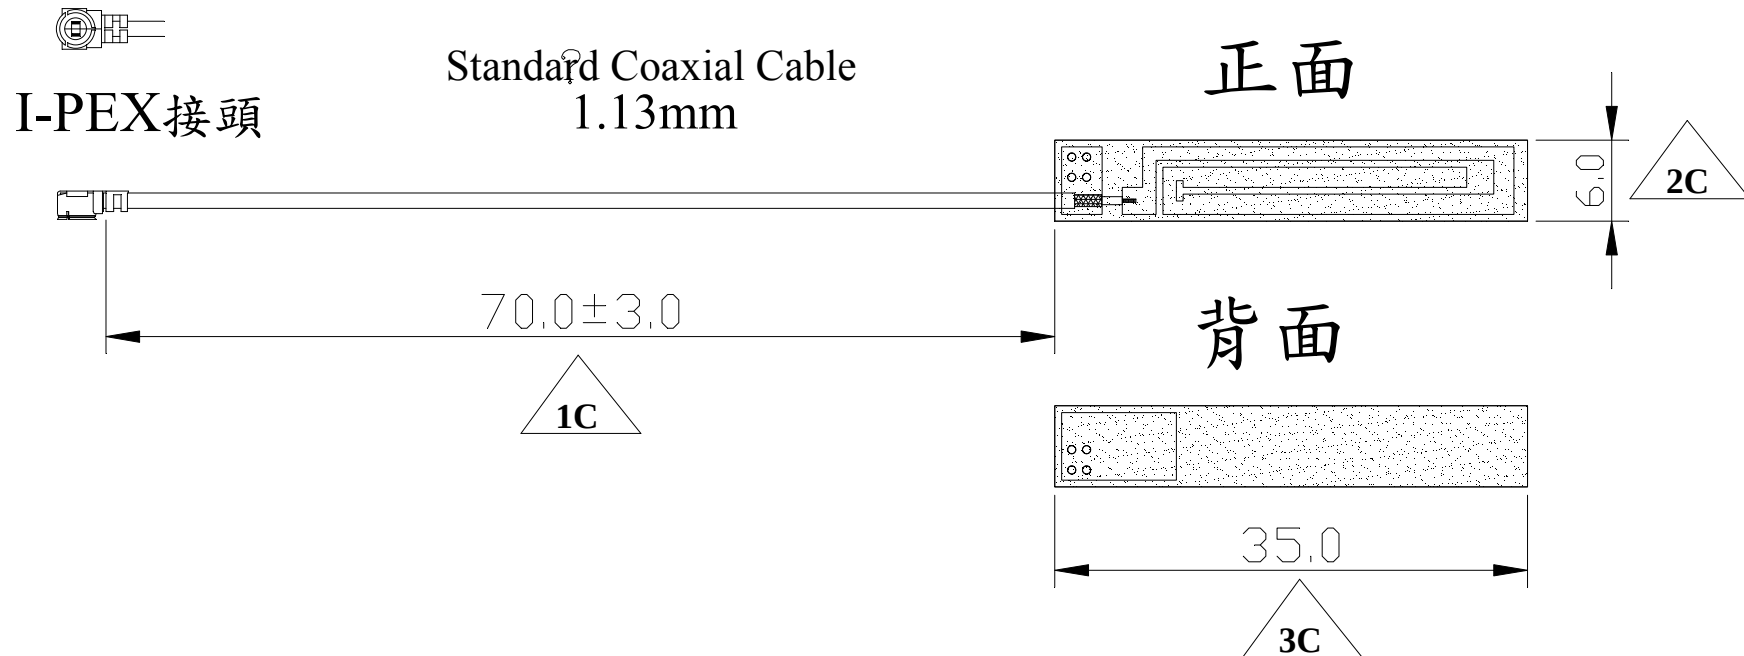

設計 DR. Wind-Kuo 2006/10/04	核准 APPD. Jerry 2006/10/04	容許公差 .XXX .XX .X X ANG	TOLERANCE ± 0.10 ± 0.25 ± 0.38 ± 0.50 $\pm 3^{\circ}$	品名 ARTICLE GSM三頻-PCB-Antenna
版本說明 REVISION NOTE				圖號 DWG NO. 6671B130300-070
KINSUN				單位 UNIT mm
				比例 SCALE 1/1
				張數 SHEET 1/1
				版本 REV. A