
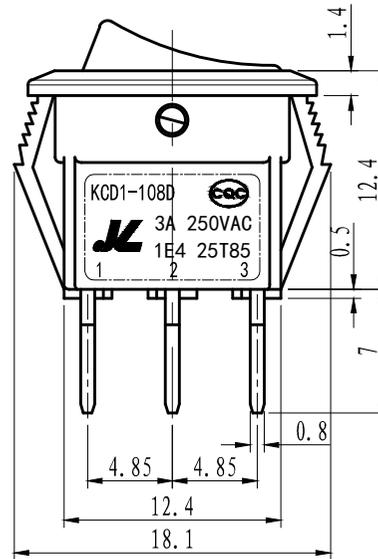
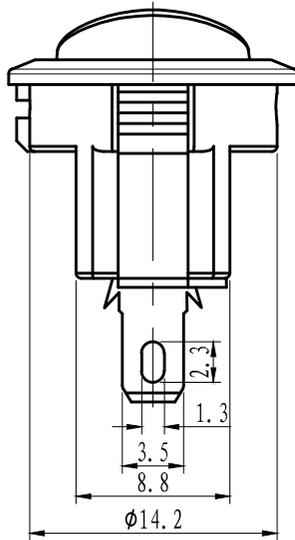
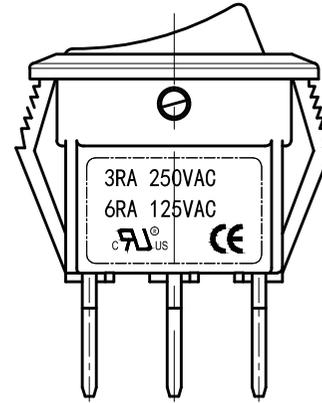


11-KCD1-108-J51F-NC


Illuminated

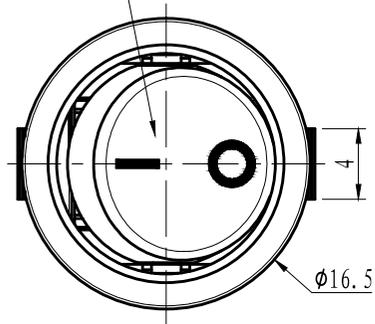

技术参数/Specifications

额定参数/Rating	3A 250V AC	
环境温度/Environment Temperature	-25 ~ 85 °C	
接触电阻 Contact Resistance	≤ 50mΩ	
绝缘电阻/Insulation Resistance	≥ 100MΩ (at 500VDC)	
耐电压 Withstand Voltage	针脚-针脚 Terminal-Terminal	1500V AC/10mA/5s
	针脚-手柄 Terminal-knob	3000V AC/10mA/5s
电气寿命 Electronical life	10,000 Cycles	
操作力 Operating Force	2N ~ 6N	

CIRCUIT:



循(通)用件登记
DRAWING (GENERAL) FILE NO.

旧版图号
OLD DRAWING FILE NO.

版图号
DRAWING FILE NO.

签名
AUTOGRAPH

日期
DATE

NOTE:
TOLERANCE UNLESS OTHERWISE SPECIFIED
X. ± 0.3 . X ± 0.2 . XX ± 0.1

				成品图 KCD1-108D-J51F-NC				浙江佳龙电子有限公司	
								船型开关	
标记	处数	更改文件号	签名	投影	版次	重量	比例	11-KCD1-108D-J51F-NC	
设计				☉	A1		2.5:1 (A4)		
审核									
工艺					共 1 页		第 1 页		