
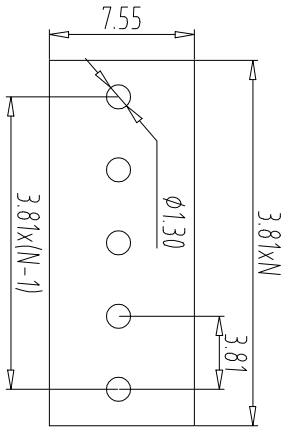

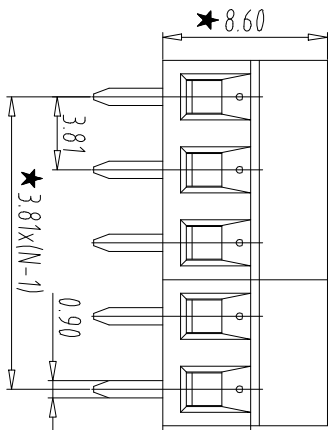


REV	EC.N NO.	CONTENT	CHK	DATE
V0.0		初版成	ZCP	

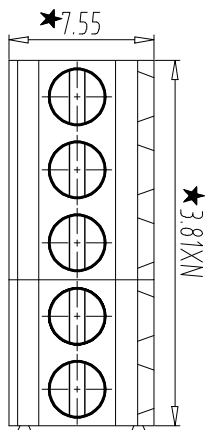

PCB layout

Total Pitch Tolerances				Nominal dimension range				Tolerance																			
in	mm	in	mm	over	over	under	under	over	over	under	under																
0	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	0	0	100	150							
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.3	0.5

NOTES:

- 1. Rating: 300V/10A
<IEC> 130V/10.5A
- 2.Poles:02-24P
- 3. Insulation Withstands Voltage: AC2000V/1 Min
- 4.Contact resistance: 20mΩ
- 5.Screw Torque Value:0.2Nm
- 6. Insulation Resistance: 500MΩ at DC500V
- 7. Wire range: 10mm² (IEC), 16-28AWG(IUL);
- 8. Using Temperature Range: -40°C/+115°C
- 9. RoHS Compliance.
- 10."With" ★ "is import dimension

How to order
U0-TB17 - 381/3.81 - XXP - Y 0 0 0A

Certificate Factory poles color: Customer

Series NO. Code 1:Grey requirements

2:Blue

3:Black

4:Green

5:Orange

6:Red

7:transparent

8:Yellow

9:White

4	Screw	31600000008	N	Steel	Zn Plated/M2.0
3	Solder Pin	3110000024	N	Brass	Sn Plated
2	Cage	3090000007	N	Brass	Ni Plated
1	HOUSING	4050000516(2P)	XX	PA66(V0)	UL94V-0
		4050000518(3P)	XX		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
------	--------------	-------------	------	----------	------

DWG.	DATE	18.10.16	UNITS	MM	SHEET/OF	1/1
CHK.	DATE		SCALE	1:1	A4	1/1
APP.	DATE		NAME	U0-TB17-381/3.81-XXP-Y000A		

NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNQ. ULO TB17Y 010A