




# RES-9242GC

## Industrial 26-port rack mount managed Ethernet switch with 24x10/100Base-T(X) and 2xgigabit combo, SFP socket

### Features

- Support **O-Ring** (recovery time < 10ms over 250 units of connection) and MSTP(RSTP/STP compatible) for Ethernet Redundancy
- **Open-Ring** support the other vendor's ring technology in open architecture
- **O-Chain** allow multiple redundant network rings
- Support standard IEC 62439-2 **MRP** (Media Redundancy Protocol) function
- Support IPV6 new internet protocol version
- Support Modbus TCP protocol
- Support IEEE 802.3az **Energy-Efficient Ethernet** technology
- Provided HTTPS/SSH protocol to enhance network security
- Support SMTP client and NTP server protocol
- Support IP-based bandwidth management
- Support application-based QoS management
- Support Device Binding security function
- Support DOS/DDOS auto prevention
- IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- Support SNMP v1/v2c/v3 & RMON & 802.1Q VLAN Network Management
- Support ACL, TACACS+ and 802.1x User Authentication for security
- SFP socket support DDM function
- Multiple notification for warning of unexpected event
- Support **DBU-01** backup unit device to quickly backup/restore configuration
- Web-based ,Telnet, Console (CLI), and Windows utility (**Open-Vision**) configuration
- Support LLDP Protocol
- 19 inches rack mountable design

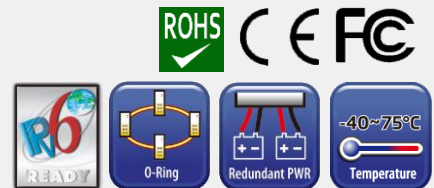


### Introduction

RES-9242GC is rack mount managed redundant ring Ethernet switch with 24x10/100Base-T(X) ports and 2xgigabit combo ports, SFP socket. RES-9242GC also support Ethernet Redundancy protocol, **O-Ring** (recovery time < 10ms over 250 units of connection) /Open-Ring/O-Chain/MRP/Fast Recovery and MSTP (RSTP/STP compatible) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. RES-9242GC supported wide operating temperature from -40 °C to 75 °C. RES-9242GC can also be managed centralized and convenient by Open-Vision, Except the Web-based interface, Telnet and console (CLI) configuration. Therefore, the switch is one of the most reliable choice for highly-managed and Fiber Ethernet application.

- **O-Ring** : O-Ring is ORing's proprietary redundant ring technology, with recovery time of less 30 milliseconds and up to 250 nodes. The O-Ring redundant ring technology can protect mission-critical application from network interruptions or temporary malfunction with its fast recover technology.


- **Open-Ring :** Open-Ring is an enhanced redundant technology that makes ORing's switches compatible with other vendor's proprietary redundant ring technologies. It enables ORing's switches to form a single ring with other vendor's switch. In cases where the ring is setup using proprietary technology, ORing offers a compatibility service where ORing can make its switches compatible with your particular network requirements.
- **O-Chain :** O-Chain is the revolutionary network redundancy technology that provides the add-on network redundancy topology for any backbone network, O-Chain allows multiple redundant network rings of different redundancy protocols to join and function together as a larger and more robust compound network topology. O-Chain providing ease-of-use while maximizing fault-recovery swiftness, flexibility, compatibility, and cost-effectiveness in one set of network redundancy topology.
- **MRP : Media Redundancy Protocol (MRP)** is a data network protocol standardized by the IEC 62439-2. It allows rings of Ethernet switches to overcome any single failure with recovery time much faster than achievable with Spanning Tree Protocol.
- **IP-based Bandwidth Management :** The switch provide advanced IP-based bandwidth management which can limit the maximum bandwidth for each IP device. User can configure IP camera and NVR with more bandwidth and limit other device bandwidth.
- **Application-Based QoS :** The switch also support application-based QoS. Application-based QoS can set highest priority for data stream according to TCP/UDP port number.
- **Device Binding Function :** ORing special Device Binding function can only permit allowed IP address with MAC address to access the network. Hacker cannot access the IP surveillance network without permission. It can avoid hacker from stealing video privacy data and attacking IP camera, NVR and controllers.
- **Advanced DOS/DDOS Auto Prevention :** The switch also provided advanced DOS/DDOS auto prevention. If there is any IP flow become big in short time, the switch will lock the source IP address for certain time to prevent the attack. It's hardware based prevention so it can prevent DOS/DDOS attack immediately and completely.
- **Modbus TCP :** This is a Modbus variant used for communications over TCP/IP networks.
- **IEEE 802.3az Energy-Efficient Ethernet :** This is a set of enhancements to the twisted-pair and backplane Ethernet family of networking standards that will allow for less power consumption during periods of low data activity. The intention was to reduce power consumption by 50% or more.

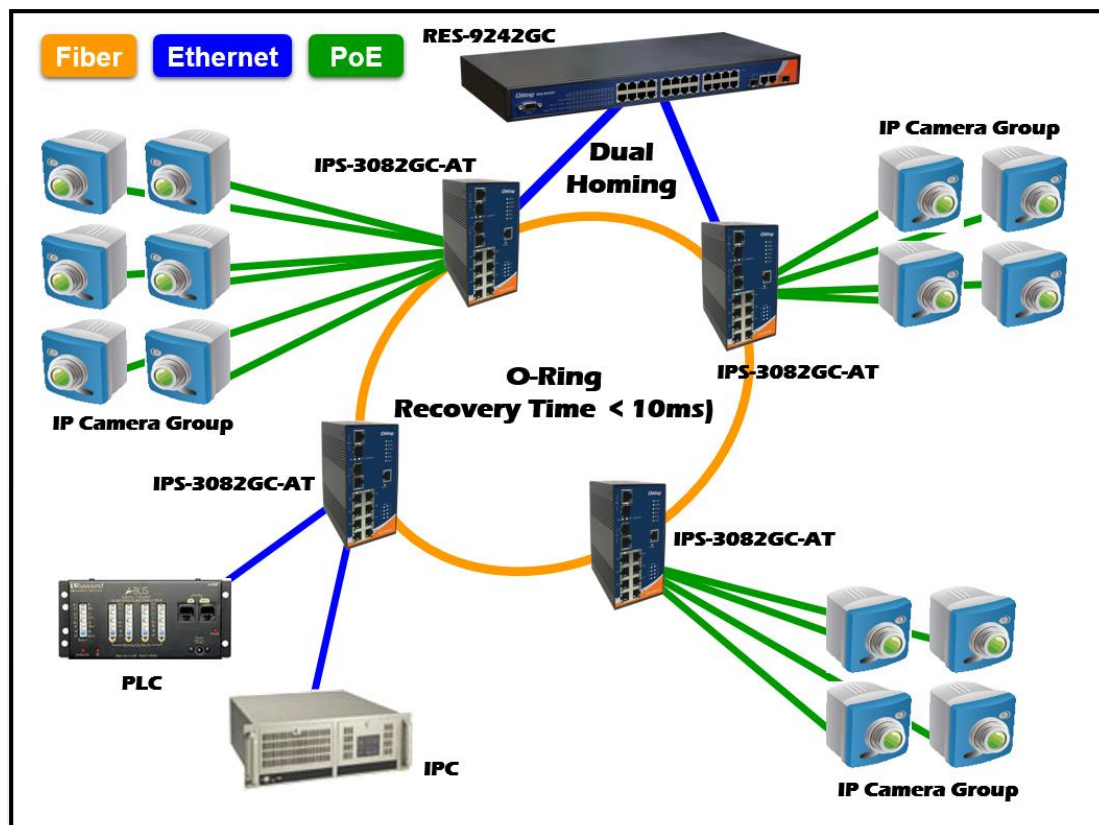


Network connection

## Open-Vision

ORing's switches are intelligent switches. Different from other traditional redundant switches, ORing provides a set of Windows utility (Open-Vision) for user to manage and monitor all of industrial Ethernet switches on the industrial network.

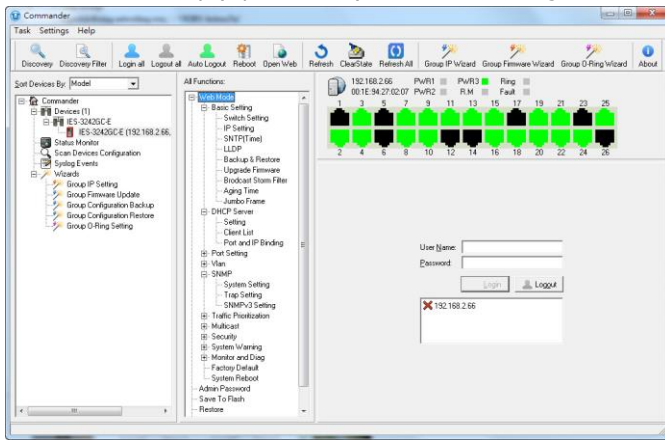


Commander

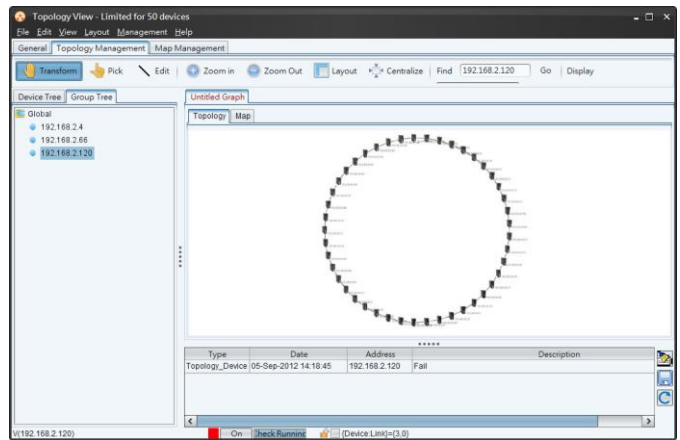

Topology View

## Dimension

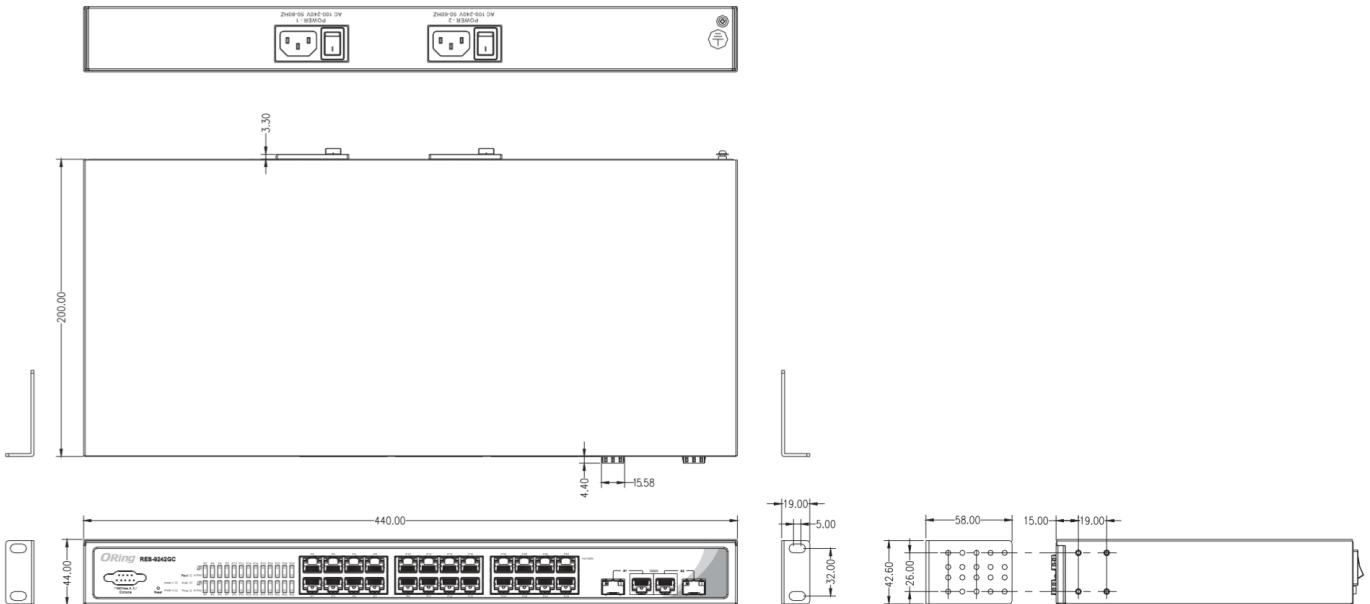

## Specifications

ORing Switch Model	RES-9242GC
<b>Physical Ports</b>	
10/100Base-T(X) with RJ45 Auto MDI/MDIX	24
10/100/1000Base-T(X) RJ45 and 100/1000Base-X SFP with combo port	2
<b>Technology</b>	
Ethernet Standards	IEEE 802.3 for 10Base-T

	<p>IEEE 802.3u for 100Base-TX                  IEEE 802.3ab for 1000Base-T                  IEEE 802.3z for 1000Base-X                  IEEE 802.3x for Flow control                  IEEE 802.3ad for LACP (Link Aggregation Control Protocol )                  IEEE 802.1p for COS (Class of Service)                  IEEE 802.1Q for VLAN Tagging                  IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol)                  IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol)                  IEEE 802.1x for Authentication                  IEEE 802.1AB for LLDP (Link Layer Discovery Protocol)</p>
MAC Table	8k
Priority Queues	8
Processing	Store-and-Forward
Switch Properties	<p>Switching latency: 7 us                  Switching bandwidth: 8.8Gbps                  Max. Number of Available VLANs: 4095                  VLAN ID Range : VID 1 to 4094                  IGMP multicast groups: 256 for each VLAN                  Port rate limiting: User Define</p>
Security Features	<p>Device Binding security feature                  Enable/disable ports, MAC based port security                  Port based network access control (802.1x)                  Single 802.1x and Multiple 802.1x                  MAC-based authentication                  QoS assignment                  MAC address limit                  TACACS+                  VLAN (802.1Q ) to segregate and secure network traffic                  Radius centralized password management                  SNMPv3 encrypted authentication and access security                  Https / SSH enhance network security                  Web and CLI authentication and authorization</p>
Software Features	<p>IEEE 802.1D Bridge, auto MAC address learning/aging and MAC address (static)                  Multiple Registration Protocol (MRP)                  MSTP (RSTP/STP compatible)                  Redundant Ring (O-Ring) with recovery time less than 10ms over 250 units                  TOS/Diffserv supported                  Quality of Service (802.1p) for real-time traffic                  VLAN (802.1Q) with VLAN tagging                  IGMP v2/v3 Snooping                  IP-based bandwidth management                  Application-based QoS management                  DOS/DDOS auto prevention                  Port configuration, status, statistics, monitoring, security                  DHCP Server/Client                  DHCP Relay                  Modbus TCP                  SMTP Client                  NTP server</p>
Network Redundancy	<p>O-Ring                  Open-Ring                  O-Chain                  MRP                  MSTP (RSTP/STP compatible)                  Fast Recovery</p>
RS-232 Serial Console Port	RS-232 in DB-9 connector with console cable. 115200bps, 8, N, 1
<b>LED indicators</b>	
Power Indicator	Green : Power indicator x 2
Ring Master Indicator (R.M.)	Green : Indicates that the system is operating in O-Ring Master mode
O-Ring Indicator (Ring)	Green : Indicates that the system operating in O-Ring mode Green Blinking : Indicates that the Ring is broken.
Fault Indicator (Fault)	Amber : Indicate unexpected event occurred
10/100Base-T(X) RJ45 Port Indicator	Green for Link/Act indicator. Green for speed indicator ~ On for 100Mbps / Off for 10Mbps
10/100/1000Base-T(X) RJ45 Port	Green for Link/Act indicator.

With Combo Port Indicator	Green for speed indicator ~ On for 100/1000Mbps / Off for 10Mbps
100/1000Base-X SFP Port With Combo Port Indicator	Green for port Link/Act.
<b>Power</b>	
Power Inputs	Dual redundant 100 ~ 240VAC with power cord
Power consumption (Typ.)	15.2 watts
Overload current protection	Present
<b>Physical Characteristic</b>	
Enclosure	19 inches rack mountable
Dimension (W x D x H)	440 x 200 x 44 mm (17.32 x 7.87 x 1.73 inch)
Weight (g)	2695 g
<b>Environmental</b>	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (-40 to 167°F)
Operating Humidity	5% to 95% Non-condensing
<b>Regulatory approvals</b>	
EMI	FCC Part 15, CISPR (EN55022) class B
EMS	EN61000-4-2 (ESD) EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1 (compliant, certification pending)
<b>MTBF</b>	TBD
<b>Warranty</b>	5 years

## Ordering Information

**RES-9AABCC**



Code Definition	10/100Base-T(X) Port Number	Additional Port Number	Additional Port Type
<b>Option</b>	- 24: 24 ports	- 2: 2 ports	-GC: Gigabit combo, SFP socket

	Model Name	Description
<b>Available Model</b>	RES-9242GC_US	Industrial 26-port rack mount managed Ethernet switch with 24x10/100Base-T(X) and 2xgigabit combo, SFP socket, US power cord
	RES-9242GC_UK	Industrial 26-port rack mount managed Ethernet switch with 24x10/100Base-T(X) and 2xgigabit combo, SFP socket, UK power cord

<b>RES-9242GC_EU</b>	Industrial 26-port rack mount managed Ethernet switch with 24x10/100Base-T(X) and 2xgigabit combo, SFP socket, EU power cord
<b>RES-9242GC_JP</b>	Industrial 26-port rack mount managed Ethernet switch with 24x10/100Base-T(X) and 2xgigabit combo, SFP socket, JP power cord

## Packing List

- **RES-9242GC x 1**
- **Rack-mount Kit x 1**
- **ORing Tool CD x 1**
- **Power Cable x 2**
- **Quick Installation Guide x 1**
- **Console Cable x 1**

## Optional Accessories

- **Open-Vision M500 : Powerful Network Management Windows Utility Suit, 500 IP devices**
- **DBU-01 : backup unit device**
- **SFP100 series : 100Mbps SFP optical transceiver**
- **SFP1G series : 1Gbps SFP optical transceiver**