



# SPECIFICATION

## 1、 PRODUCT PICTURE

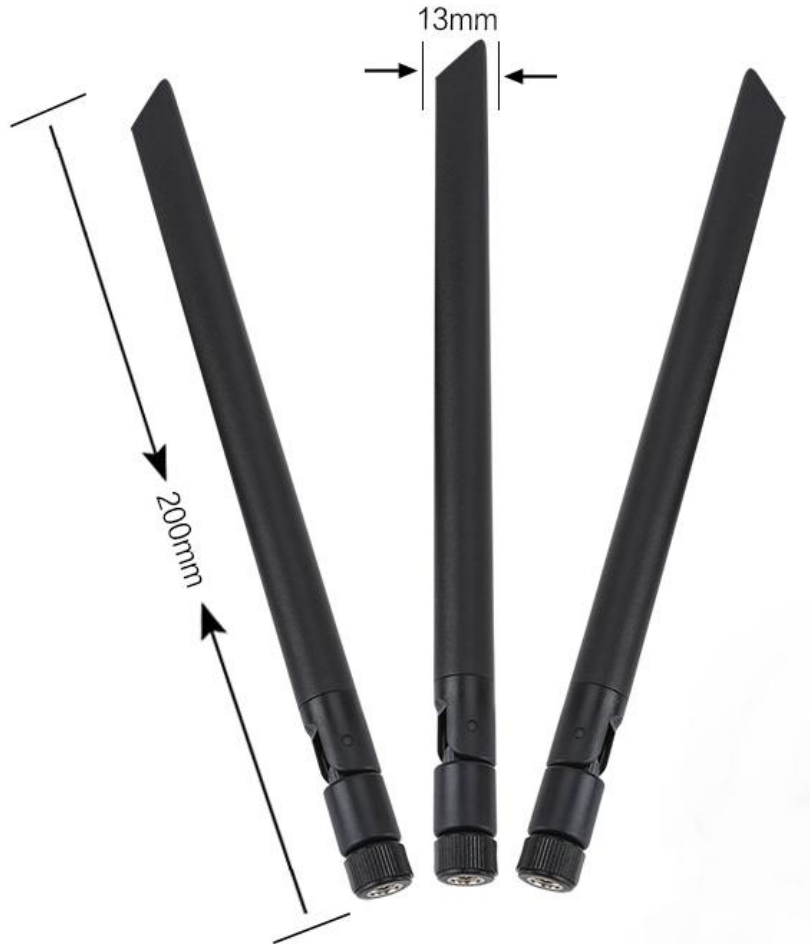

6	Cable	RG-178 Cable,Transparency Brown,50 Ω	1
5	Connector	Shell POM ( Black ) nickel plating white teeth	1
4	Rivet	POM,Color:Black	2
3	Bottom Base	PBT,Color:Black	1
2	Upper Base	PC,Color:Black	1
1	Antenna Cap	TPE;Color:Black	1
NO	DESCRIPTION		Q'TY

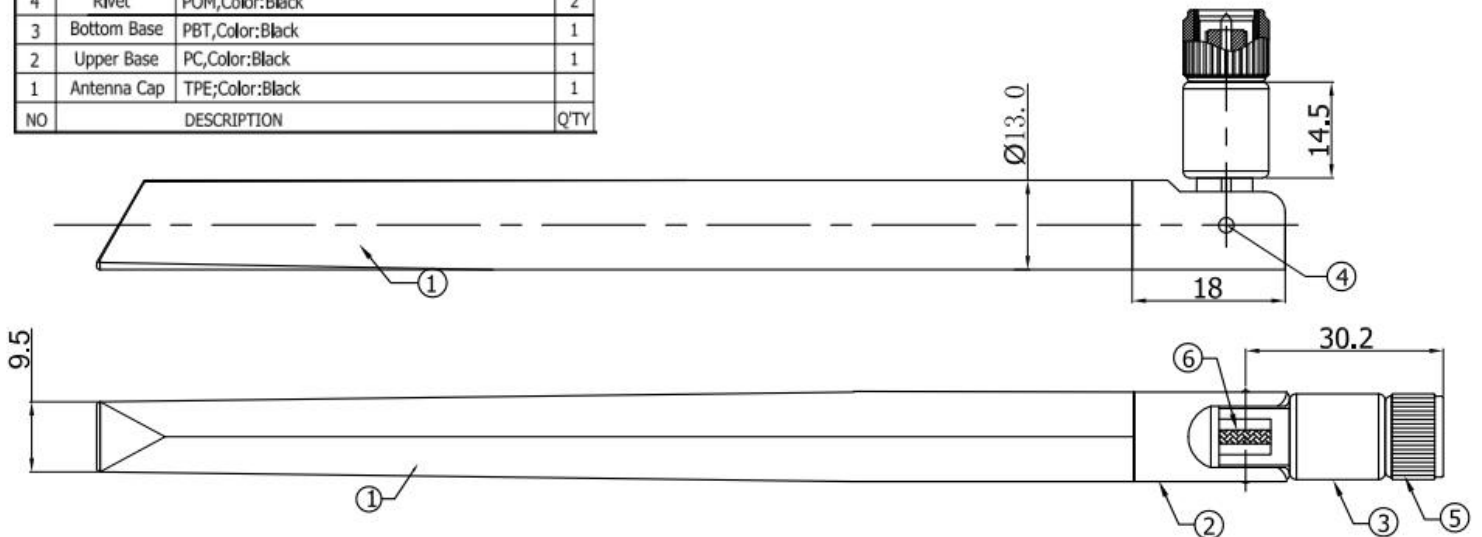

## 2、SPECIFICATIONS

Item	Specifications	
Part Number	GSM-ANT-LTE-SR	
Antenna	Frequency Range	698-960/1710-2700MHz
	Polarization	Linear
	Gain	5dBi (Zenith)
	V.S.W.R (min)	≤2.5
	Impedance	50 Ω
	Connector	SMA Male
Environmental	Operating Temperature	-40℃~+85℃
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant

## 3. STATIONARY WAVE PATTERN (V.S.W.R)

