


I Direction		
PIN	Signal	Insulation Color Overall Shield
1	Overall Shield	
2		
3	Y + Receive	BLUE
4	Y Transmit	BLUE
5	Y - Receive	BLACK
6	Y Ground	YELLOW
7	Shield	
8	X Ground	GREEN
9	X+Receive	WHITE
10	X Transmit	RED
11	X-Receive	RED
12		

sensor 1	Y-Transmit
sensor 2	Y-Receive
sensor 3	X-Receive
sensor 4	X-Transmit

Product Requirement:
Glue line way: on the bevel edge

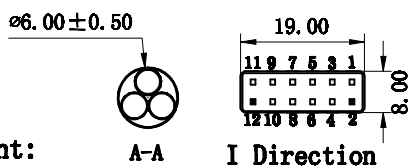

Unmarked Tolerance		
from (mm)	to (mm)	Quality Level
0	10	±0.05
10	50	±0.10
50	100	±0.15
100	200	±0.20

mark	Content of Amendment	Edition	Author	Date
Design		standard		
Drawing		process		
Check		Approve		

SAW screen specs		
sign	weight	Scale
AD		Free
Total X 1 P X 1 P		

CTB
Duggan Church Electronic co., Inc.

product
CTB201N-4F

Drawing No.