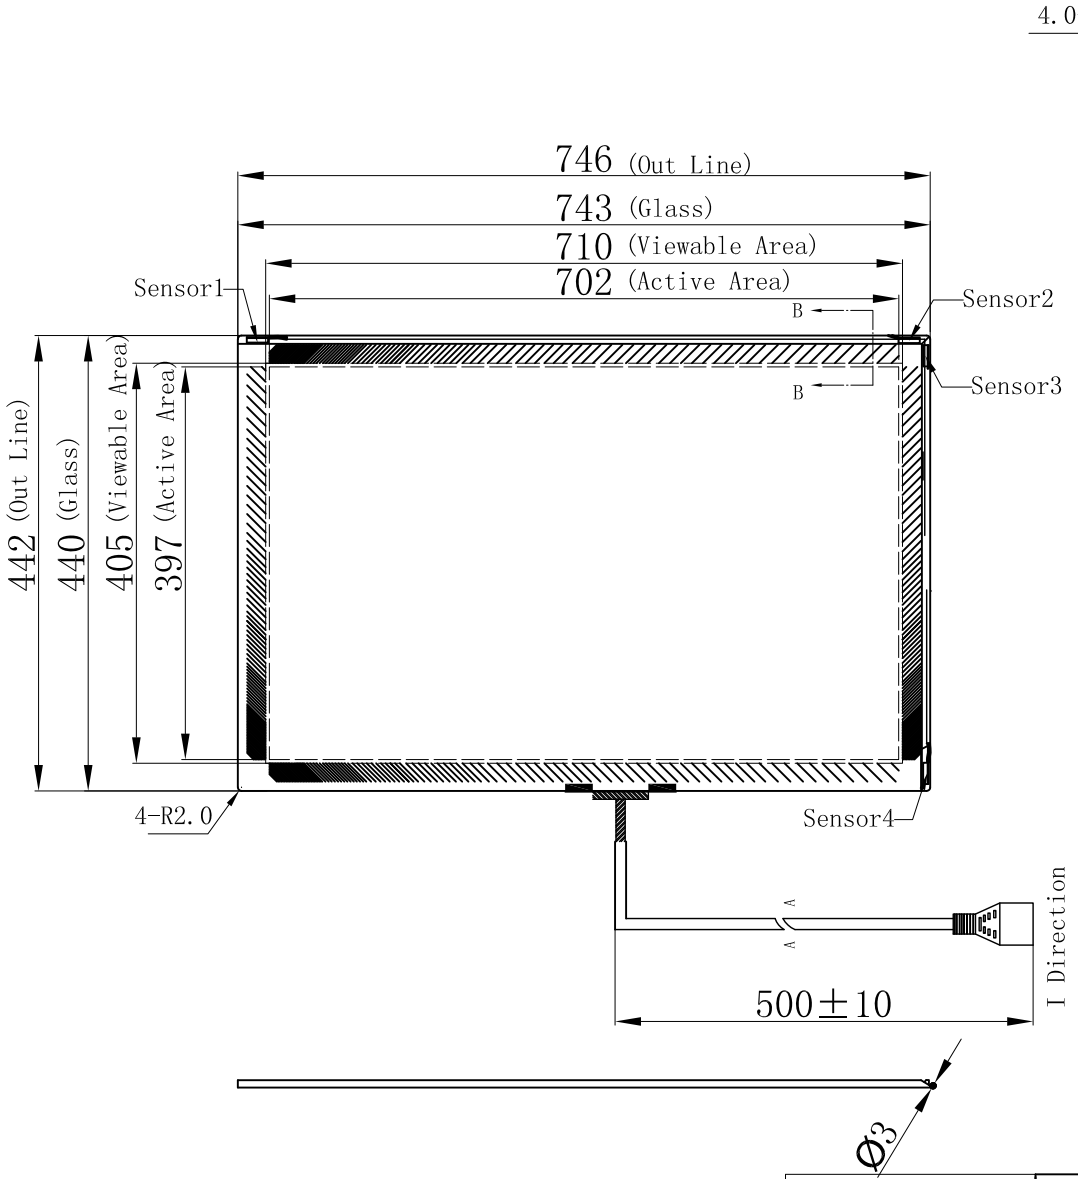

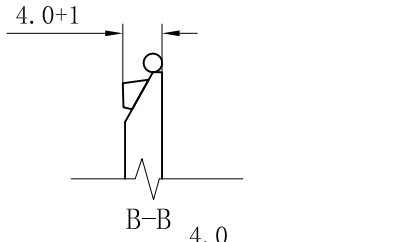

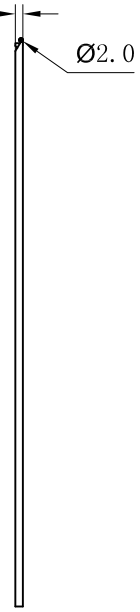

I Direction		
PIN	Signal	Insulation Color Overall Shield
1	Oierall Shield	
2		
3	Y + Receive	BLUE
4	Y Transmit	BLUE
5	Y − Receive	BLACK
6	Y Ground	YELLOW
7	Shield	
8	X Ground	GREEN
9	X+Receive	WHITE
10	X Transmit	RED
11	X−Receive	RED
12		

sensor 1	Y-Transmit
sensor 2	Y-Receive
sensor 3	X-Receive
sensor 4	X-Transmit





Unmarked Tolerance		
from (mm)	to (mm)	Quality Level ✓ Level
0	10	±0.05
10	50	±0.10
50	100	±0.15
100	200	±0.20

mark	Content of Amendment	Edition	Author	Date
Design		standard		
Drawing		process		
Check		Approve		

SAW screen specs

sign	weight	Scale
A0		Free

Total X 1 P X 1 P

ThinkTouch
Dongguan CJtouch Electronic co,. ltd.

product
CTB-F320C-4K

Drawing No.