

REV	E.C.N NO.	CONTENT	CHK	DATE
V0.0		初版	ZCP	2016.11.24

NOTES:


- Rating: 300V/10A
<IEC> 250V/10.5A
- Poles: 3P
- Insulation Withstands Voltage: AC2000V/1Min
- Insulation Resistance: 500MΩ at DC500V
- Using Temperature Range: -40°C/+115°C
- Max soldering : +250° for 5S
- RoHS Compliance
- Suitable Electric Wire: 28-18AWG(UL) 0.2-1.0mm² (IEC) 9With" ★ "is important dimension

How to order

ULO-TB12 - 250A/3.5 - 10P -1 0 0 0A

Certificate Factory poles color: Customer requirements
 Series NO. Code

- 1: Grey
- 2: Blue
- 3: Black
- 4: Green
- 5: Orange
- 6: Red
- 7: transparent
- 8: Yellow
- 9: White

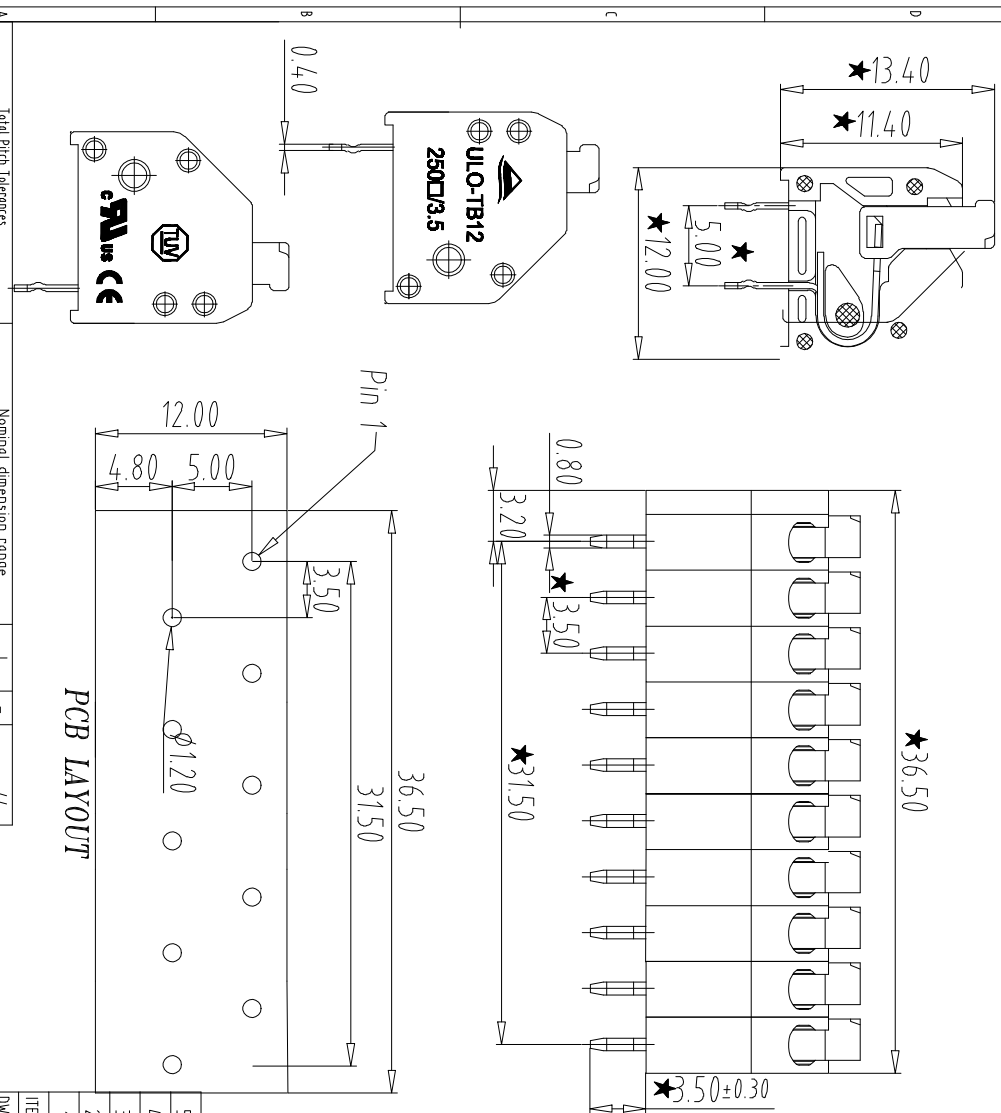

PCB LAYOUT

Total Pitch Tolerances		Nominal dimension range							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30
±0.18	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.20
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30
±0.18	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.20

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
1	Housing	3001A0YXXA	3	PA66	UL94V-0
2	Cover	3001C0Y00A	1	PA66	UL94V-0
3	LEVER	3001D0Y00A	3	PA66	UL94V-0
4	LONG-PIN	3001B0010	2	Phosphor bronze	Tin Plated
5	SHORT-PIN	3001B0020	1	Phosphor bronze	Tin Plated



NINGBO ULO ELECTRONICS CO.,LTD.
 宁波欧路电子有限公司

DWG	ZCP	DATE	16.11.24	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1:1	A4	
APP.		DATE		NAME	ULO-TB12-250A/3.5-10P-1000A		
				DWGNO	ULO1B12YVWA		