

Antenna YGL001AA Datasheet

Antenna Services

Version: 3.2

Date: 2022-10-17

Status: Released





At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236 Email: info@quectel.com

Or our local offices. For more information, please visit:

http://www.quectel.com/support/sales.htm.

For technical support, or to report documentation errors, please visit:

http://www.quectel.com/support/technical.htm.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an "as available" basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Antenna Datasheet 1 / 21



Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties ("third-party materials"). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2022. All rights reserved.

Antenna_Datasheet 2 / 21



About the Document

Revision History

Version	Date	Author	Note
-	2020-06-17	Kenny YIN	Creation of the document
1.0	2020-08-05	Kenny YIN	First official release
1.1	2020-12-17	Kenny YIN	Updated the picture of the antenna in Chapter 2.
1.2	2021-01-27	Kenny YIN	Added IP rating description in Chapter 3.
2.0	2021-03-19	Kenny YIN	Updated the test data in the datasheets.
2.1	2021-07-25	Kenny YIN	Updated working temperature (Chapter 3).
2.2	2021-11-27	Kenny YIN	Updated the product description in Chapter 1.
3.0	2022-04-25	Kenny YIN	Updated the RF data (Chapter 4).
3.1	2022-07-04	Kenny YIN	Added the packaging information (Chapter 6).
3.2	2022-10-17	Aria CHU	Deleted the IP rating.

Antenna_Datasheet 3 / 21



Contents

Co	ntents		 4
1	Product De	scription	 5
2	Product Fe	atures	 5
3	Product Sp	ecifications	 6
4	Overall Per	formance	7
	4.2. VSW	R	8
	4.3.1.	•	
	4.3.2.	1710–2690 MHz	9
	4.3.3.		
	4.3.4.		
	4.4. Gain		
	4.4.1.	600–960 MHz	11
	4.4.2.	1710–2690 MHz	11
	4.4.3.	3300–4200 MHz	12
	4.4.4.	4300-5000 MHz	 12
	4.5. Radia	ation Pattern	 13
	4.5.1.	600 MHz	 14
	4.5.2.	700 MHz	 14
	4.5.3.	820 MHz	 15
	4.5.4.	960 MHz	 15
	4.5.5.	1710 MHz	 16
	4.5.6.	2170 MHz	 16
	4.5.7.	2690 MHz	 17
	4.5.8.	3300 MHz	 17
	4.5.9.	4200 MHz	 18
	4.5.10.	5000 MHz	18
5	Product Siz	e	 19
6	Packaging		20



1 Product Description

This Quectel external 5G antenna covers 5G NR Sub-6 GHz frequency bands and is compatible with 4G/3G/2G/LPWA bands. Featuring high efficiency and gain, it is an ideal omni-directional antenna solution to ensure high-speed data transmission, which can be widely used in a diversity of wireless communication devices such as AP, routers, outdoor equipment, real-time monitoring equipment, and many more. The antenna is designed to work with any ground plane size or in free space for ease of integration. Quectel also offers flexible installation with custom cable length and connector options.

2 Product Features

- Cellular 5G
- High efficiency
- Excellent performance



Antenna_Datasheet 5 / 21



3 Product Specifications

Passive Ele	ectrical S	pecificatio	ns								
Frequency F	Range			600–9	600–960 MHz, 1710–2690 MHz, 3300-5000 MHZ						
Input Impen	dence			50 Ω							
VSWR				≤ 5.0							
Gain				≤ 3 dE	Bi						
Polarization	Туре			Linear							
Detailed Pas	ssive Ele	ctrical Spe	cifications								
Frequency Range (MHz)	698–960	1176–1280	1400–1610	1710–2170	2170–2690	3300–4000	4000–5000	5000–6000			
VSWR (Max.)	3.2	-	-	2.3	2.1	3.1	3.1	-			
Average Efficiency (%)	36.8	-	-	51	67.2	44.4	50.2	-			
Max. Peak Gain (dBi)	0.63	-	-	1.65	2.73	3.08	3.26	-			
Mechanical	Specific	ations									
Antenna Siz	e			196.2	196.2 mm × 16 mm × 13 mm						
Casing				ABS	ABS						
Cable Type	& Length			-	-						
Connector T	уре			SMA	SMA Male (Center Pin)						
Working Ter	mperature)		-40 °C	-40 °C to +85 °C						
Weight				Typ. 1	9.3 g						
Radome Co	lor			White	White						

Antenna_Datasheet 6 / 21



4 Overall Performance

4.1. Test Environment


- KEYSIGHT ENA Network Analyzer E5063A, 100 kHz 8.5 GHz.
- RayZone®2800 Chamber 5G (FR1) SISO/MIMO, 600 MHz 8.5 GHz.



Antenna_Datasheet 7 / 21



4.2. **VSWR**

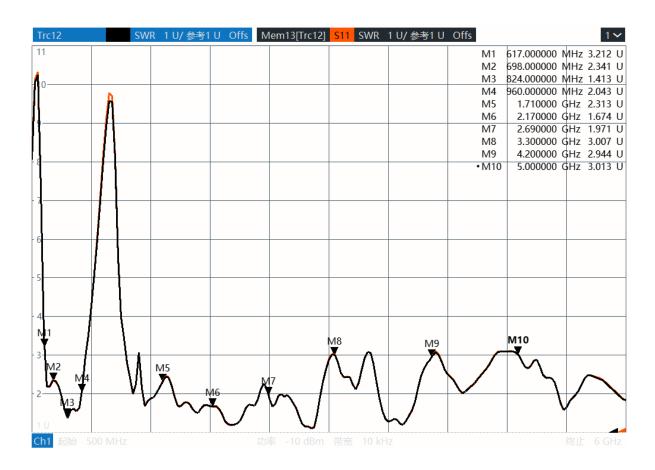


Frequency (MHz)	617	698	824	960	1710	2170	2690	3300	4200	5000
VSWR	3.2	2.3	1.4	2.0	2.3	1.7	2.0	3.0	2.9	3.0

Antenna_Datasheet 8 / 21




4.3. Efficiency

4.3.1. 600-960 MHz

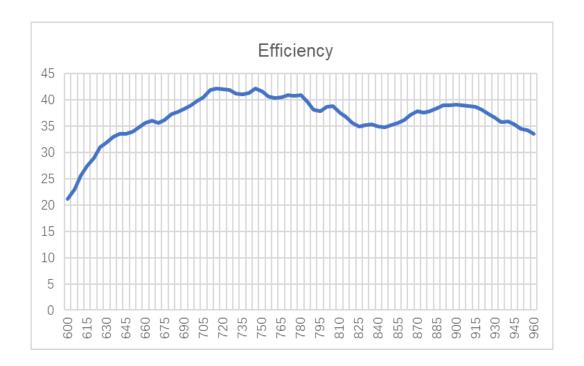


4.3.2. 1710-2690 MHz

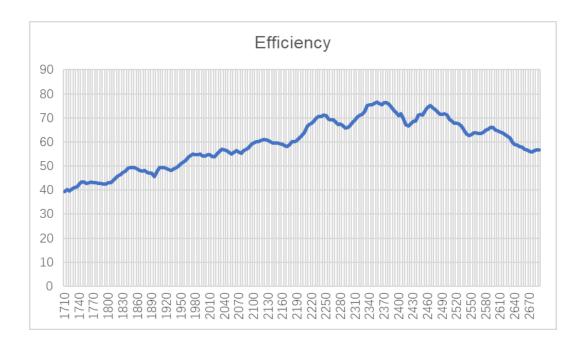


Antenna_Datasheet 9 / 21



4.3.3. 3300-4200 MHz

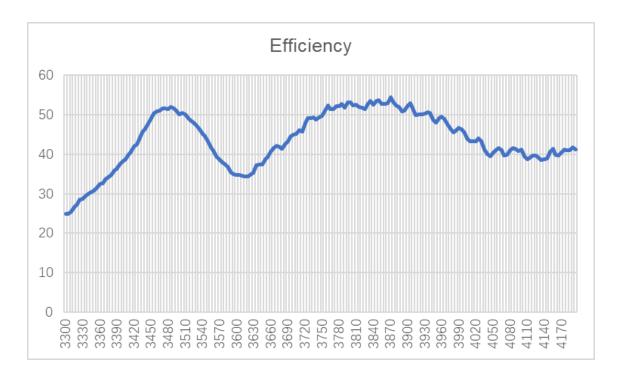

4.3.4. 4200-5000 MHz

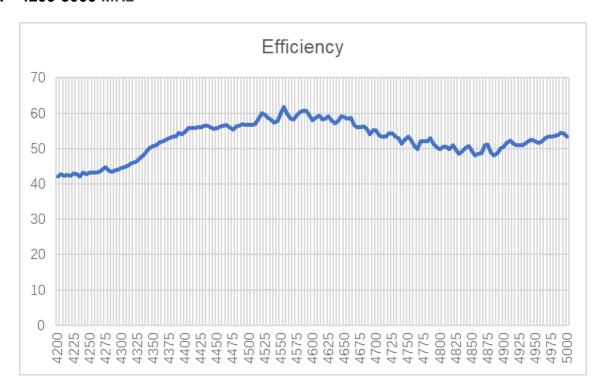


Frequency (MHz)	617	698	824	960	1710	2170	2690	3300	4200	5000
Efficiency (%)	28.1	39.3	34.3	33.6	39.5	58.2	56.7	24.8	42.2	53.4

Antenna_Datasheet 10 / 21




4.4. Gain

4.4.1. 600-960 MHz

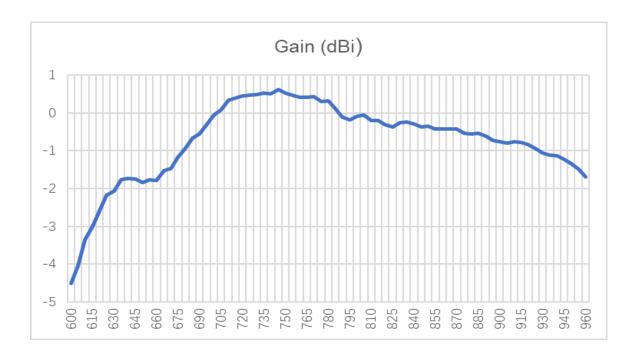


4.4.2. 1710-2690 MHz

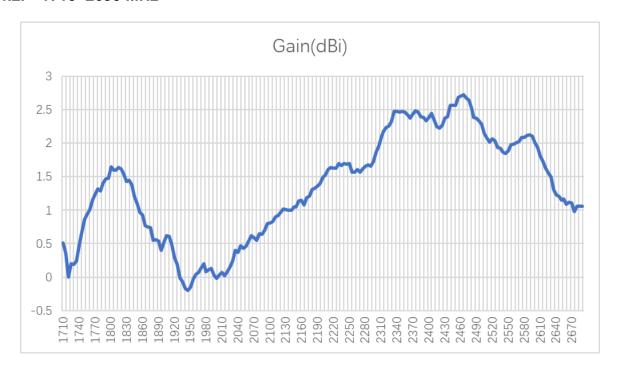

Antenna_Datasheet 11 / 21



4.4.3. 3300-4200 MHz

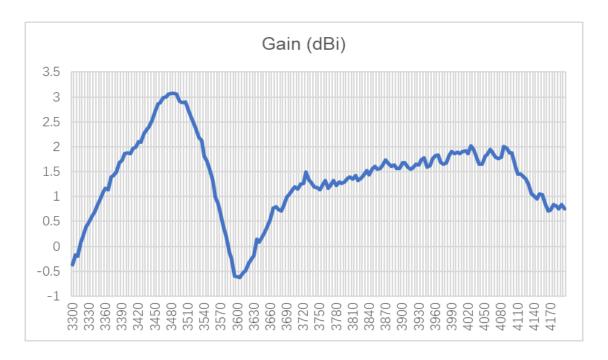

4.4.4. 4300-5000 MHz




Frequency (MHz)	617	698	824	960	1710	2170	2690	3300	4200	5000
Gain (dBi)	-2.7	-0.1	-0.35	-1.68	0.51	1.91	1.06	-0.37	0.71	3.24

Antenna_Datasheet 12 / 21



4.5. Radiation Pattern


Test condition: free space.

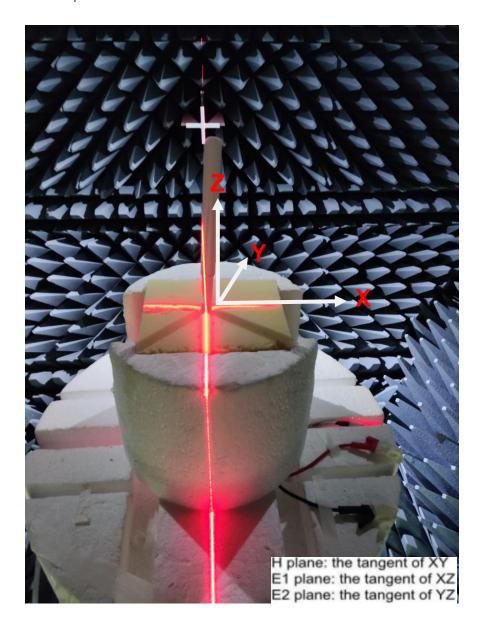


Antenna_Datasheet 13 / 21



4.5.1. 600 MHz

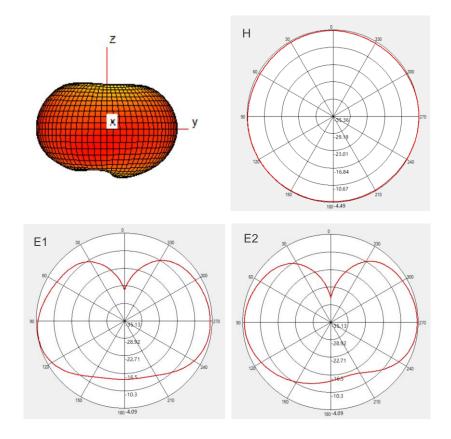


4.5.2. 700 MHz

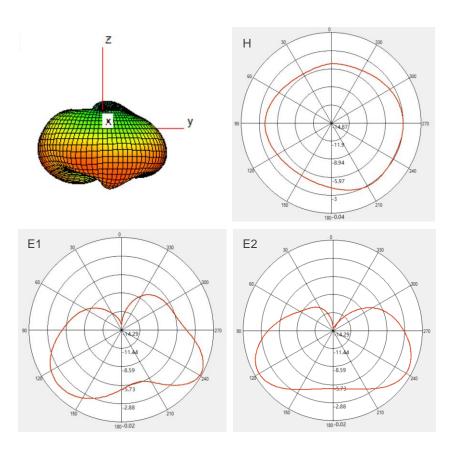


Antenna_Datasheet 14 / 21



4.5.3. 820 MHz

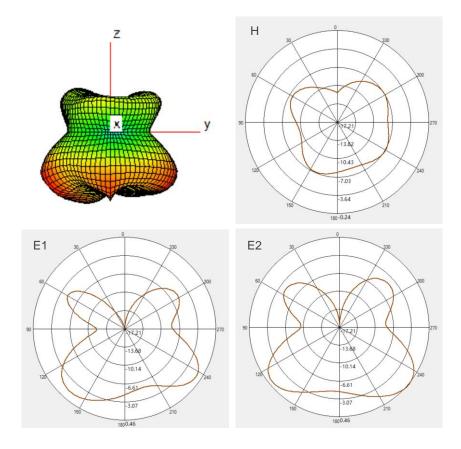


4.5.4. 960 MHz

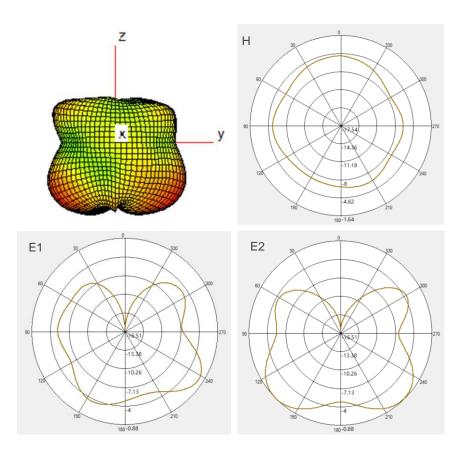


Antenna_Datasheet 15 / 21



4.5.5. 1710 MHz

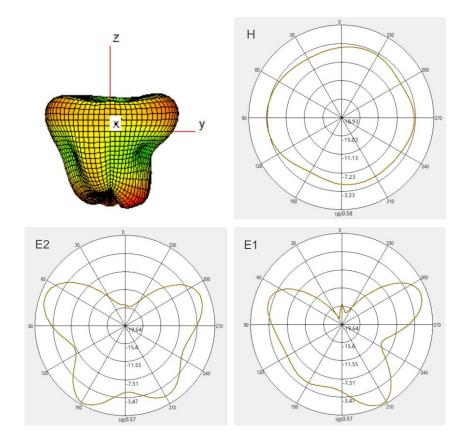


4.5.6. 2170 MHz

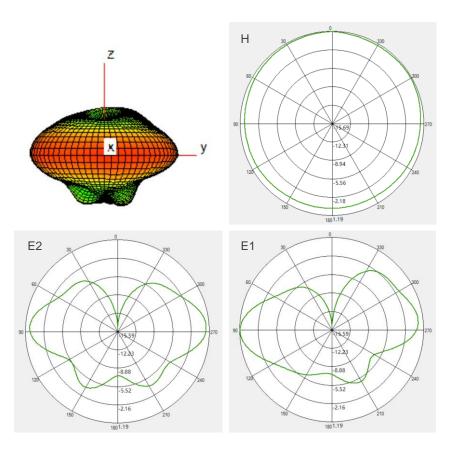


Antenna_Datasheet 16 / 21



4.5.7. 2690 MHz

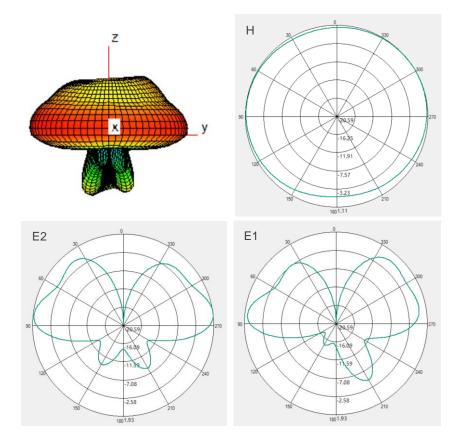


4.5.8. 3300 MHz

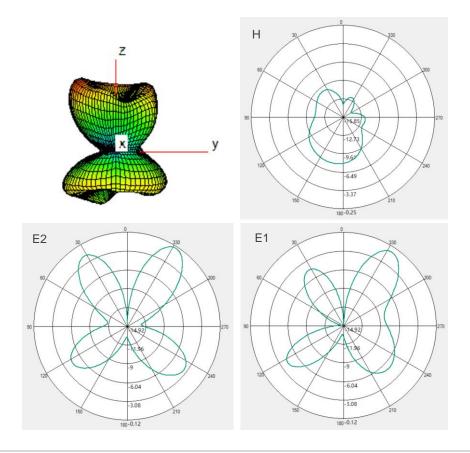


Antenna_Datasheet 17 / 21



4.5.9. 4200 MHz

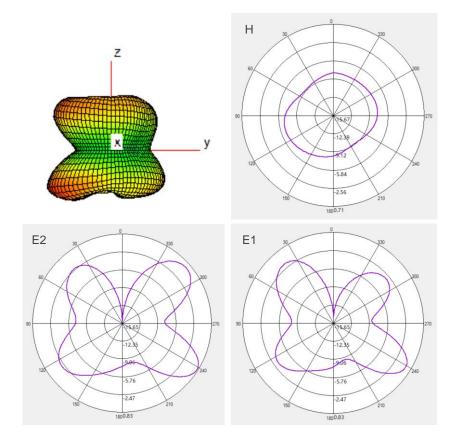


4.5.10. 5000 MHz

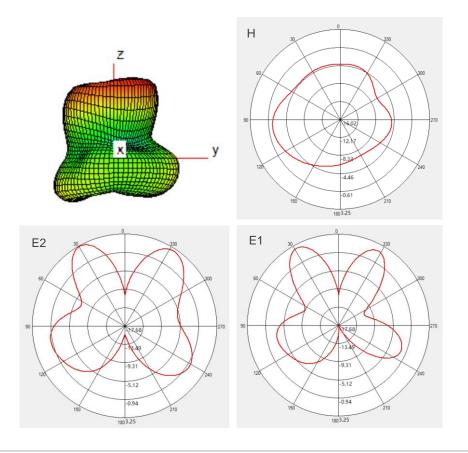

Antenna_Datasheet 18 / 21



5 Product Size

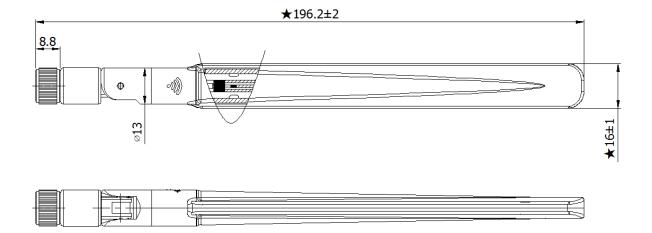

ROHS



Antenna_Datasheet 19 / 21




6 Packaging

Step	Packaging Picture/ 2D Picture	Description
1		 Put the product into the PE bag. Uniform the placement direction. 50 PCS/PE Bag.
2		3 PE Bags/ Layer.5 Layers/ Carton.
3		 Each layer is neatly arranged. Antenna Quantity: 750 PCS. Carton Size: 450 × 240 × 290 mm.
4		Position for Attaching Labels ① Carton Label ② Quality Label

Antenna_Datasheet 20 / 21



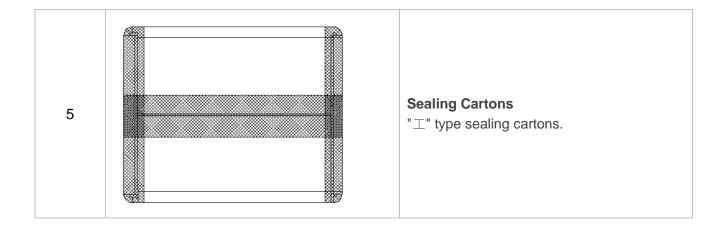

Antenna_Datasheet 21 / 21