

## DAISY-4X1-WW-WHT

~80° wide beam. 4X1 variant in gloss white.



### TECHNICAL SPECIFICATIONS:

Dimensions	182.0 x 40.0 mm
Height	20.2 mm
Fastening	pin, screw, clips
Colour	
Box size	
Box weight	0 kg
Quantity in Box	504 pcs
ROHS compliant	yes ⓘ



### MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
DAISY-4X1-WW	Linear lens	PMMA	clear
DAISY-4X1-SHD-WHT	Shade	PC	

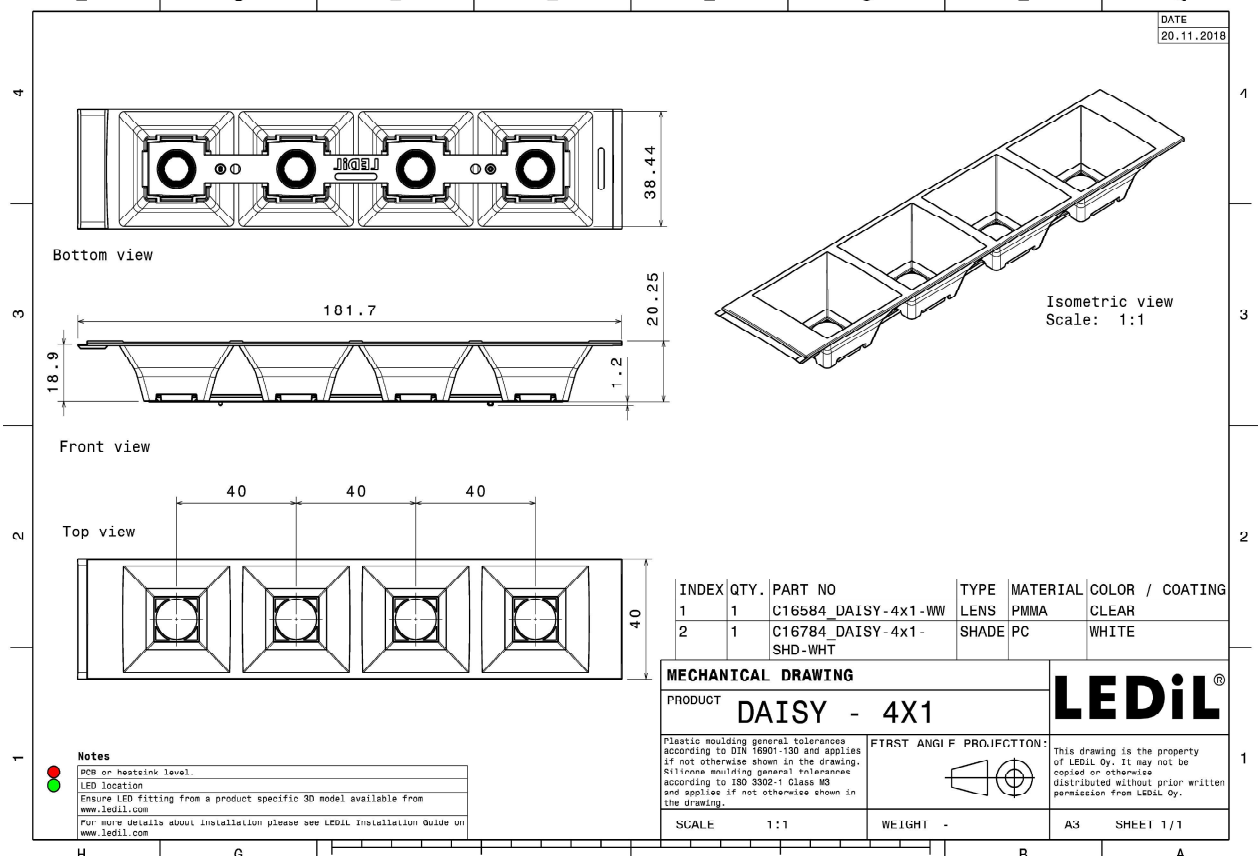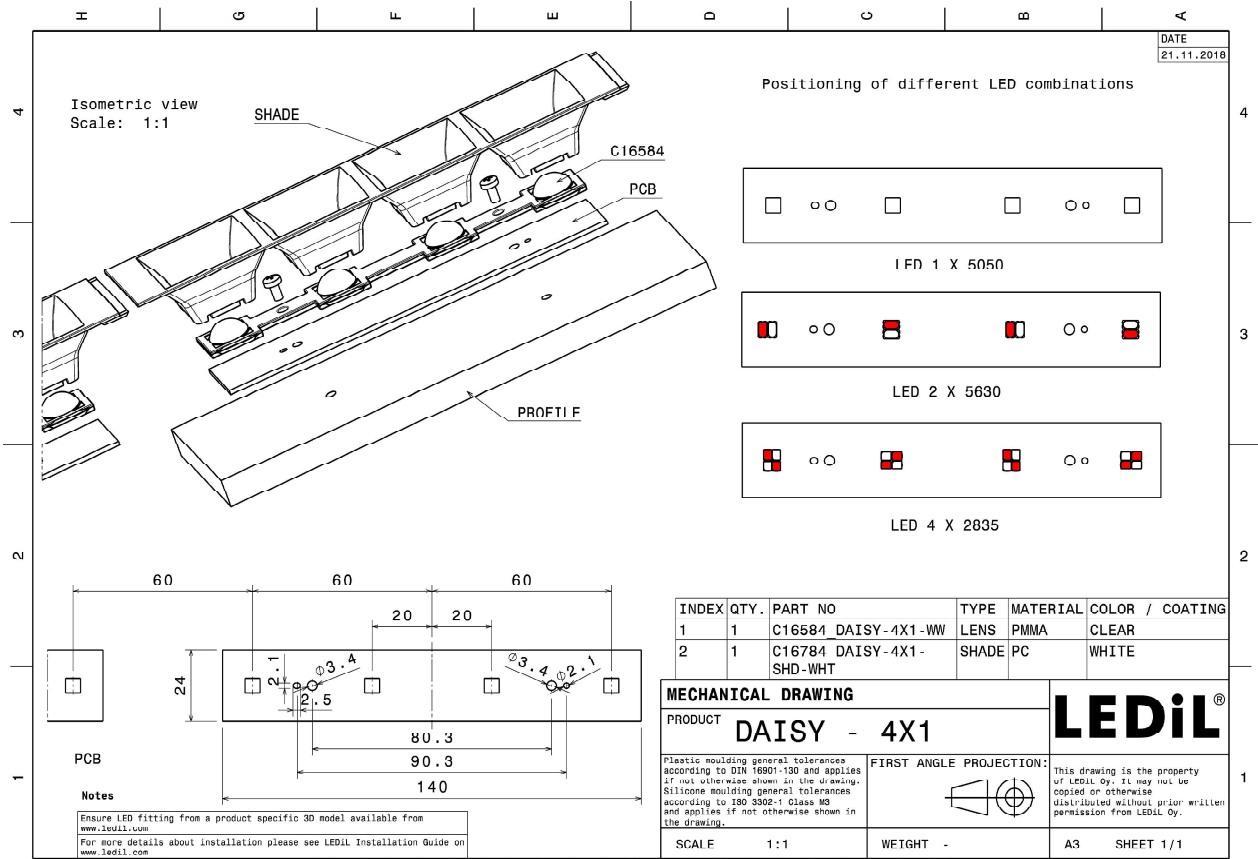

#### PHOTOMETRIC DATA (MEASURED):


#### SAMSUNG

LED LM28xB Series  
 FWHM 76.0°  
 Efficiency 94 %  
 Peak intensity 0.640 cd/lm  
 LEDs/each optic 4  
 Light colour White  
 Required components:

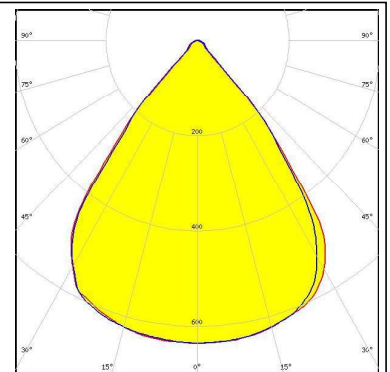
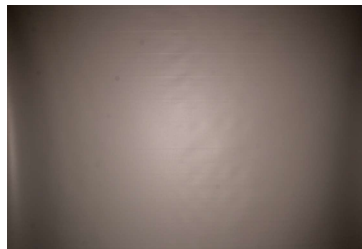


#### SAMSUNG

LED LM28xB Series  
 FWHM 77.0°  
 Efficiency 94 %  
 Peak intensity 0.620 cd/lm  
 LEDs/each optic 2  
 Light colour White  
 Required components:


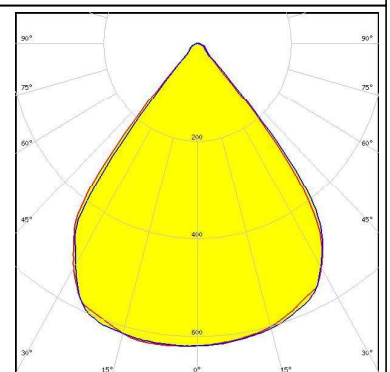


LED SEOUL DC 3030  
 FWHM 75.0°  
 Efficiency 92 %  
 Peak intensity 0.651 cd/lm  
 LEDs/each optic 4  
 Light colour Tunable White  
 Required components:

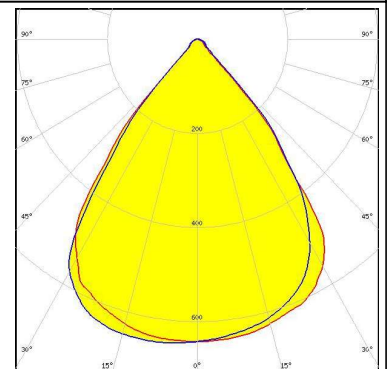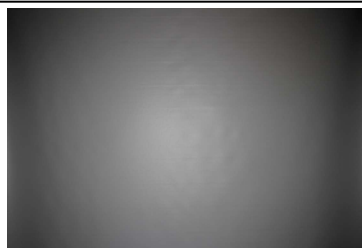

#### TRIDONIC



LED LLE 24x140mm 400lm 827-865 LVD ADV1  
 FWHM 76.0°  
 Efficiency 94 %  
 Peak intensity 0.640 cd/lm  
 LEDs/each optic 4  
 Light colour White  
 Required components:

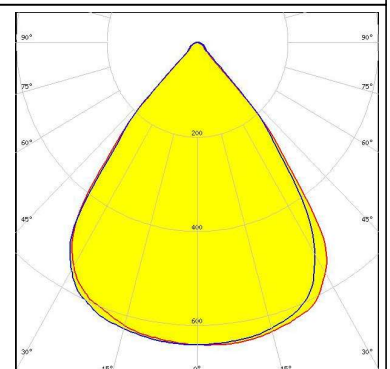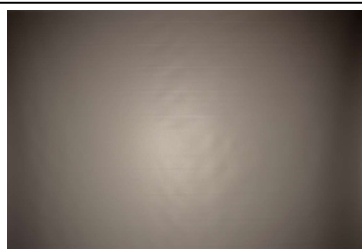

#### PHOTOMETRIC DATA (MEASURED):

#### TRIDONIC

LED LLE 24x140mm 400lm 8x0 LVD ADV1  
FWHM 77.0°  
Efficiency 94 %  
Peak intensity 0.640 cd/lm  
LEDs/each optic 4  
Light colour White  
Required components:

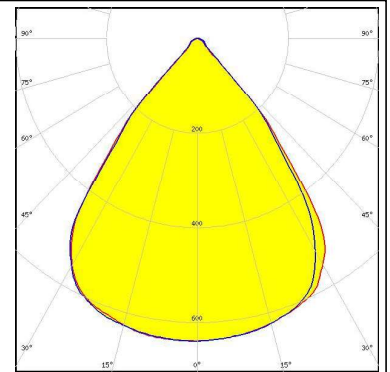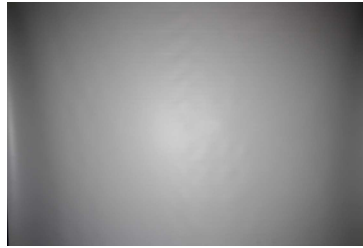

#### TRIDONIC

LED LLE 24x280mm 750lm 8x0 LVD ADV1  
FWHM 76.0°  
Efficiency 94 %  
Peak intensity 0.640 cd/lm  
LEDs/each optic 4  
Light colour White  
Required components:

