


ELPL-G401


PCIe to four isolated GbE LAN Module

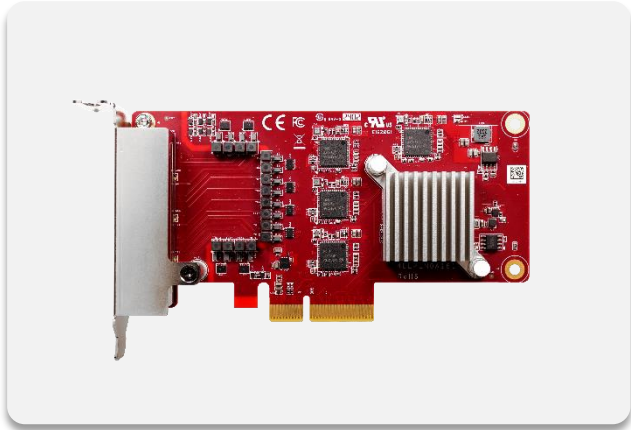

Features

- Intel i210 controller, support four GbE LAN ports
- Support PCIe low-profile bracket
- Complies with EN61000-4-5 2kV surge protection
- Complies with IEC 60950-1:2005 + A1: 2009 + A2:2013 1kV HiPOT protection
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Optional Industrial Temperature (-40°C to +85°C) support
- 30μ" golden finger, 3-year warranty
- Industrial design, manufactured in innodisk Taiwan

Mechanical Drawing

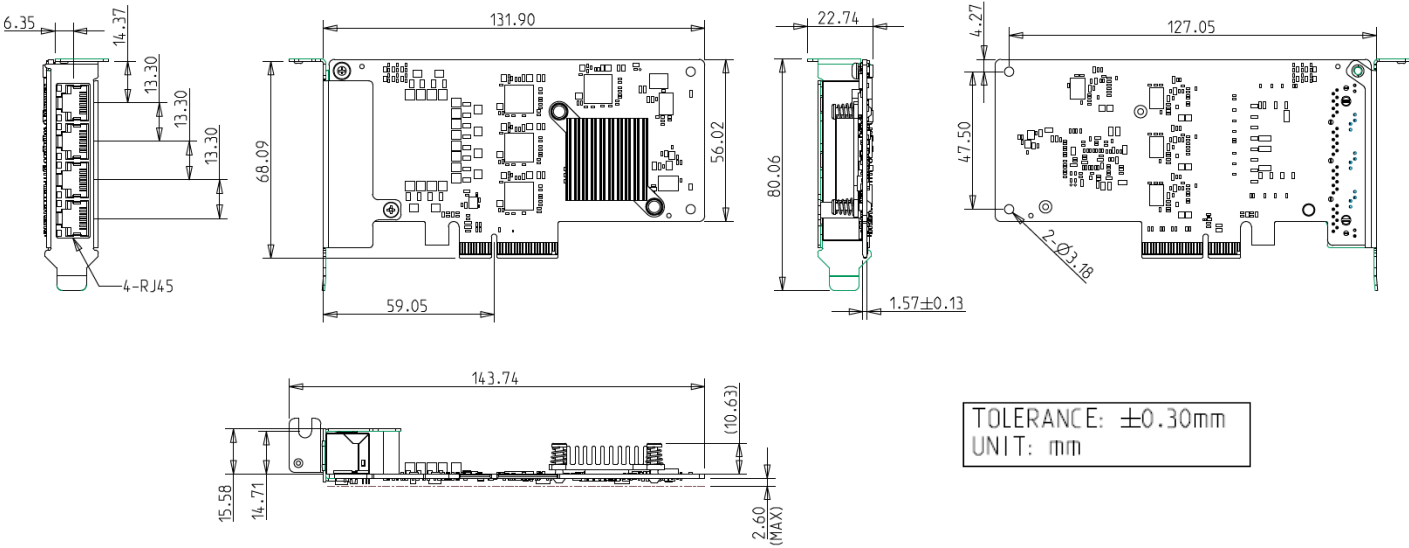

Specifications

Headquarters (Taiwan)
5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan

Tel: +886-2-7703-3000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421

Europe
esusales@innodisk.com
+31-40-3045-400

Japan
jpsales@innodisk.com
+81-3-6667-0161

China
sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2024 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

May 15, 2024

Form-Factor	Low-Profile PCIe
Input I/F	PCI Express 2.1 x 4
Output I/F	GbE LAN x 4
Output Connector	RJ45 x 4
Power Consumption	MAX: 7.77W (12V, 467.3mA + 3.3V 656.4mA)
Dimension (WxLxH)	131.9 x 56.02 x 19.88 mm
Temperature	Operation: STD: 0°C ~ +70°C. W/T: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	Please download driver from Intel official website. Windows: XP(32bit), 7(32/64bit), 8/8.1(32/64 bit), 10(32/64bit), 11 Linux: kernel 2.4 series, 2.6.x and 3.x version.
Limitations	ELPL-G401 series does not recommend used in VMware ESXi due to High Latency

Order Information

ELPL-G401-C1 (Standard Temp.)

ELPL-G401-W1 (Wide Temp.)

Low-Profile PCIe to four isolated GbE LAN Module

www.innodisk.com